

European Office

Taylor House • 34 Sherwood Road • Bromsgrove Worcestershire • B60 3DR • England

Tel: 44 (0) 1527 520 999 Fax: 44 (0) 1527 501 999 E-mail: info@sti-emea.com • Web: www.sti-emea.com

USA - Headquarters

2306 Airport Road • Waterford, Michigan 48327-1209


Phone: 248-673-9898 • Fax: 248-673-1246 E-mail: info@sti-usa.com • Web: www.sti-usa.com

Housing Removal BUTTON AND SWITCH ASSEMBLY SWITCH HOUSING ALLEN HEAD SCREW #8-32 x 3/8 in. (1) PROVIDED T3/32" HEX WRENCH (1) PROVIDED



ONCE INSTALLATION IS COMPLETE, SECURE COVER WITH SCREW AND HEX WRENCH (SHOWN).

SS2xx2, SS2xx5 & SS2xx9 models

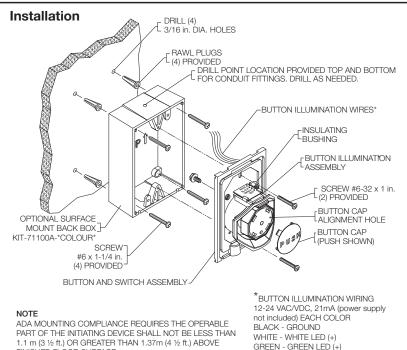

Safety Notice to Installers and Users

This push button has been tested according to UL2017. It is important to read, understand and follow all instructions provided with this product. Non-fire alarm initiating devices are listed in UL category UEHX. It is the installer's responsibility to comply with NEC and Canadian electrical code, mounting specifications according to ADA and other applicable fire and electrical codes. To avoid electrical shock, DO NOT attempt to install this product when power is on. To avoid possible confusion with fire alarm initiating devices, do not mount a red stopper station near a manual fire alarm initiating device. ADA mounting compliance requires the operable part of the initiating device shall not be less than 1.1m (3 1/2 ft.) or greater than 1.37m (4 1/2 ft.) above finished floor service. After installation and testing are complete, provide a copy of this manual to all personnel responsible for testing and maintenance of this product. Push buttons for outdoor use must be mounted with STI outdoor rated covers.

SS2xx8 models

This push button has been tested according to UL2017. Non-fire alarm initiating devices are listed in UL category UEHX. It is important to read, understand and follow all instructions provided with this product. It is the installer's responsibility to comply with NEC, Canadian Electrical Code, mounting specifications according to ADA and other applicable fire and electrical codes. After installation and testing are complete, provide a copy of this manual to all personnel responsible for testing and maintenance of this product. To avoid electrical shock, DO NOT attempt to install this product when power is on. **Note:** To reduce potential risk, STI discourages use of a pneumatic timer button as an emergency power disconnect or any control that may restart automatically at the end of the timing sequence.


NOTE For LTUL Models, Form "C" contacts on timer, Rated 30 VDC 3A, the enclosed timer is to be used and installed per the enclosed LT-1UL installation sheet. LTUL Models, Form "C" contacts on timer, Rated 30 VDC 3A maximum rating 30 VDC 3A. For access control installations, power for the LT-1 Timer must be supplied by a power source listed to UL294. When used for access control, this device shall be used as part of an access controlled egress door system. It is up to the local AHJ to allow use of this device in place of an automatic sensor. For higher security installations, lower time limits should be used.

Wire Connections MAKE SURE LEAD IS FULLY CONNECTED TO MOUNTING TAB ON CONTACT SET 1 COM NO CONTACT SET 2 CONTACT BOX CONTACT SWITCHES CONTACT SWITCHES

On Site Button Reconfiguration

Stopper Station button is configured as ordered. If needed, installer can reconfigure function to: Kev-to-Reset. Momentary or Turn-to-Reset.


Changing Push Button Function



- 1. Remove contact block screws from mounting plate.
- 2. To change button function remove the plate and use directions provided.
- Reassemble backplate and contact box (ensure contact tabs are facing up as shown).
- 4. If reconfiguring from Turn-to-Reset, remove Turn-to-Reset label.

Note: If you remove stop pin and wedge block, consider keeping for potential future use.

Product Dimensions



INSTALLATION OF SS-2xx2, 2xx5, 2xx8 and 2xx9 SERIES STOPPER®STATION

RED - RED LED (+)


All specifications and information shown were current as of publication and are subject to change without notice.




KIT-102720-*COLOUR




KIT-71100A-*COLOUR*

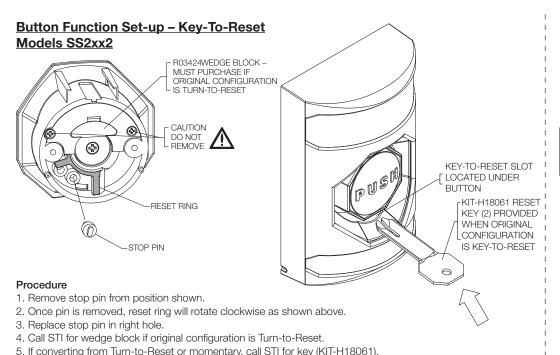


Button Function Set-up - Turn-To-Reset Models SS2xx9





- 1. Remove wedge block.
- 2. Remove stop pin from right hole.
- 3. Reset ring will rotate clockwise as shown.
- 4. Place stop pin in left hole.
- 5. If converting from either momentary or Key-to-Reset, call STI for reset label (L16210).

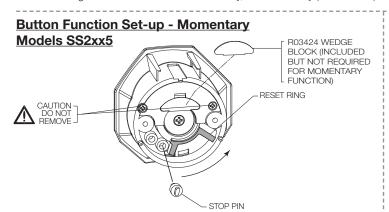

1. Rotate reset ring counterclockwise as shown above.

3. If converting from Key-to-Reset, disregard key.

2. Place stop pin in position shown.

Procedure

Button Function Set-up - Pneumatic Models SS2xx8

Contact Rating

One set NO and one set NC Rated at 10 AMP @ 240 VAC Recognized Component listing is 1,000,000 cycles

Operating Temperature of button 15° to 120°F (-9° to 49°C)

Contacts

INSTALLATION NOTES


- 1. ADA mounting compliance requires the operable part of the initiating device shall not be less than 1.1m (3 1/2 ft.) or greater than 1.37m (4 1/2 ft.) above finished floor service.
- 2. The continuity of the conduit system (if applicable) shall be maintained.

Switch Information



Contact Diagram

CONNECTION AND LEAD WIRE COLOUR CODE



One set NO and one set NC

Black NC • • NC Green Red NO • NO White

TIMER RANGE ADJUSTMENT SCREW ADJUSTMENT RANGE - 2 TO 60 SECONDS

TIMER FACTORY SET TO MINIMUM TIME SETTING, TO INCREASE TIME, TURN SCREW CLOCKWISE IN 1-4 TURN INCREMENTS. WHEN CLOSE TO DESIRED TIME, TURN SCREW IN VERY FINE INCREMENTS TO DESIRED SETTING. **CAUTION: OVER-TIGHTENING MAY** CAUSE DAMAGE TO TIMER.

MARNING: This product can expose you to chemicals including Dichloromethane, which is known to the State of California to cause cancer, and Bisphenol A (BPA') which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

INSTALLATION OF SS-2xx2, 2xx5, 2xx8 and 2xx9 SERIES STOPPER®STATION

All specifications and information shown were current as of publication and are subject to change without notice.