

EM50




DOUBLE STANDARD MAGLOCK DOUBLE MONITORED 12/24VDC

Standard double-monitored double magnetic lock designed for indoor applications where 545kg holding force is required. Monitoring provides LED lock status indication and two separate relay contact-sets (per side) for signalling.

FEATURES

- MOV provides spike and surge protection
- Fail-safe operation (power to lock)
- Anti-residual magnetism protection
- Top-plate, armature-plate and fixings included
- Dual voltage 12Vdc or 24Vdc (selectable)
- Surface mount
- Silver anodised aluminium finish
- Double lock-monitoring

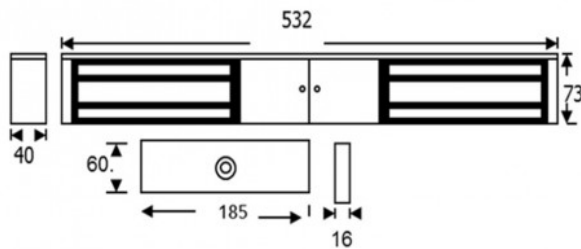

TECHNICAL INFORMATION

- Holding force: up to 545kg (1200lb) per side
- Current draw = 500mA @ 12Vdc / 250mA @ 24Vdc per side
- Voltage tolerance: +/- 15%
- Operating temp: -10°C to +55°C
- Humidity: 0-95% non-condensing
- Weight: 9.6kg approx.
- Red/Green LED indicator
- 2 relays per side, each with: COM/NO/NC (1A@24Vdc)

RELATED PRODUCTS



DG500



EM30



EM500AZLG-DC



NT200-S