




SBP-300HF/ 301HF/302HF/ 303HF

Dimensions

Unit:mm(inch)

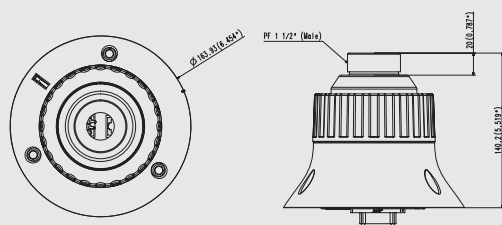

	SBP-300HF	SBP-301HF	SBP-302HF	SBP-303HF
COMPATIBLE MODEL				
Camera List	SNP-6320H/ 5430H	SNP-6321H/ 5321H	PNP-9200RH/ XNP-6370RH	XNP-6550RH/ 6371RH/ 6320H/ QNP-6230H/ 6230RH
EXTERNAL CONNECTION				
Alarm I/O	Input 4ea / Output 2ea			
Remote Control Interface	RS-485/422			
Audio	Input/Output, 3.5mm type			
CVBS	BNC Type, For Installation			
Power Line	24V AC, 2-wire			
OPTICAL CHARACTERISTICS				
Support SFP Voltage	3.3V Typical			
Support SFP Current	300mA Max.			
Support SFP Cage	Standard mini-SFP Cage (for 6.5mm pitch SFP)			
Support SFP Port Type	LC Type			
Required SFP Speed	1250Mbps(For 1000Mbps Ethernet) 155Mbps(For 100Mbps Ethernet)			
Required SFP's BER (Bit Error Rate)	Max 10 ⁻¹²			
Transmission Method (Optical)	Mode Depends on SFP Module			
Optical Mode (Long/Short Wave)	Mode Depends on SFP Module			
Cable Insertion Loss(dB)	Mode Depends on SFP Module			
NETWORK CHARACTERISTICS				
RJ-45 : Ethernet Speed	100Mbps			
RJ-45 : Ethernet Physical Layer	100 Base-T			
RJ-45 : Ethernet Standard	IEEE 802.3u Support			
Speed Transition (100↔1000Mbps)	External Dip Switch			
Fiber : Default Speed	1000Mbps			
Fiber : Ethernet Speed	100Mbps, 1000Mbps			
Fiber : Ethernet Physical Layer	100 Base-FX, 1000 Base-X			
Fiber : Ethernet Standard	IEEE 802.3u, IEEE 802.3z Support			
ENVIRONMENTAL				
Operating Temperature / Humidity	-50°C to +55°C / Less than 90% RH			
Ingress Protection	IP66			
Vandal Resistance	IK10			
ELECTRICAL				
Power Consumption	3.1A, 65W Max (Heater ON)		4.1A, 92W Max (Heater ON)	
Input Voltage / Current	24V AC			
MECHANICAL				
Colour / Material	Aluminum			
Dimension (Ø x H)	Ø163.9 x H157.9mm Ø163.9 x H187.9mm (with NPT-Coupling)			
Weight	1.1kg 1.4ka (with NPT-Coupling)			

* The latest product information / specification can be found at hanwha-security.com

* Design and specifications are subject to change without notice.

* Wisenet is the proprietary brand of Hanwha Techwin.