

Aidalarm

Mains Powered - A600LKITM & A600LKITMD



Disabled Persons Toilet Alarm Kit

This mains powered kit meets the requirements for emergency signalling systems for disabled persons. It is fully compliant with BS8300 and the Disability Discrimination Act.

Everything is provided in the kit (except cable and fixings) to deliver an effective, fully compliant, simple to install and simple to use system.

To generate a call the user simply pulls the pull cord. When the call is generated an audible and visual warning is given at both the toilet area and at the Aidalarm controller which can, if required, be located away from the toilet possibly in a reception area. The call can be muted at the controller by pressing the button at the centre of the four LEDs. This will cause the Aidalarm to bleep every 40 seconds as a warning of non attendance to reception. The audible indications at the toilet area will bleep every five seconds to re-assure the caller. The system can only be reset at (or near) the point of call using the Reset Button. Locating the controller outside of the toilet area eliminates the need for mains wiring within the toilet/washroom avoiding conflict with Part P building regulations. The controller is mains powered and fitted with integral standby batteries (supplied). A single pole volt free changeover relay is fitted for connection to a remote indicator or a building management system.

- DDA & BS8300 Compliant
- Controller with High Power Piezo Sounder
- Four selectable Warning Tones
- Mains Powered with Standby batteries
- Audible & Visual Signalling to remote point
- Ceiling Pull Cord with LED
- Pull Cord Instruction Label with Braille
- Reset Button with LED, Sounder & Braille
- Overdoor Audible Visual Indication
- Relay output
- Optional Call Buttons
- Battery powered version (A600LKITB) available

A600LKITM includes:

- 1 x A600L mains powered Aidalarm controller
- 1 x S1600-R Pull cord with re-assurance LED
- 1 x LAB35107 Pull Cord instruction label with braille
- 1 x S1708A Aidalarm Reset button with re-assurance LED, sounder and braille
- 1 x S1778A Aidalarm Overdoor light and sounder
- 6 x AA Standby batteries





A600LKITMD includes:

- 1 x A600L mains powered Aidalarm controller
- 1 x S1600-R Pull cord with re-assurance LED
- 1 x LAB35107 Pull Cord instruction label with braille
- 1 x S1708A Aidalarm Reset button with re-assurance LED, sounder and braille
- 1 x S1778A Aidalarm Overdoor light and sounder
- 1 x RPD01000 1m water proof panic strip
- 6 x AA Standby batteries



Optional accessories such as Press to Call push buttons can be added to suit requirements

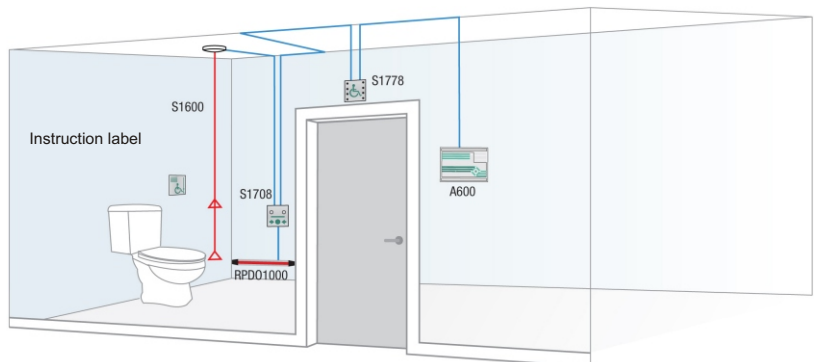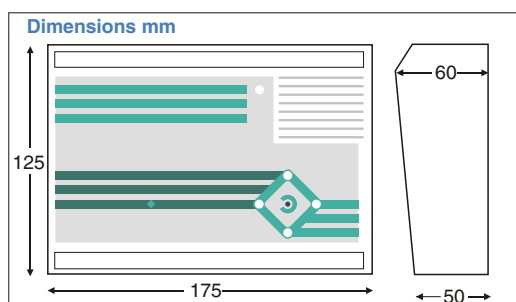

Hoyles Electronic Developments Ltd

T. 01744 886600

F. 01744 886607

E. sales@hoyles.com

W. www.hoyles.com

