

PSI Displays Ltd




Suite C2, Butts Business Centre, Butts Road, Chiseldon, Swindon, Wiltshire, SN4 0PP. UK.

Tel: +44 (0) 1793 740456

e-mail: sales@psidisplays.co.uk Website www.psidisplays.co.uk

LCD COLOUR MONITOR Model No. LRM7531

2 Monitors x 7.0" TFT LCD with Digital Colour LED Backlight. Inputs of VGA, Composite Video x 2 BNC with single Loop through. Metal Cased in 19" Rack Mounting. Other sizes available.

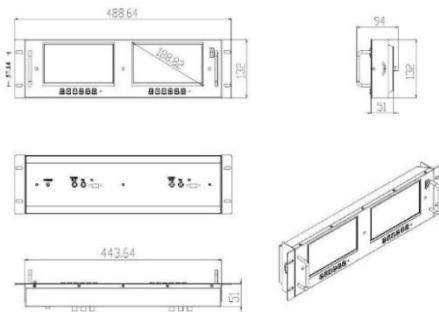

Main Features:

- Resolution: 800xRGBx480
- Picture Ratio: 16:9 and 4:3
- Brightness: 280 cd/m2 LED Back Light.
- Contrast Ratio: 500:1
- Input: VGA, Composite Video x 2 BNC.
- Composite Video Out x 1 BNC.
- LCD Panel Screen Protector.
- Full OSD
- Metal Cabinet finished in Black.
- Mounting: 19" Rack Mount. 3U high.
- Single Power connection with Main Switch.
- Rack Tilt 30/30°.
- VESA DDC2B and DPMS.
- Hot Keys: V1/V2/VGA, L/R/U/D.

The LRM7531 offers 2 Monitors of 7.0" TFT LCD in one rugged 19" rack mounting 3U high. With Digital panel, Active Matrix technology and LED Backlight it offers a superb sharp and high contrast images. Individual On/Off switch and Full OSD with Hot keys. Composite Video input x 2 and single output (loop through). 12 volt operation via single power source. With universal application potential, the unit is ideal for surveillance systems, monitoring systems and multimedia video applications.

SPECIFICATIONS:

- Active area: 154.08 x 86.58 (WxH)mm. • 16.2M Colours. • PAL and NTSC Auto.
- Response Time: 6.2/6.2ms (Tr / Tf). • Viewing angle: Left/Right: 45°, Up: 10°. Down: 30°.
- Controls: Menu, +, -, Up/Down image reverse, Video 1/2, On/Off, with On LED.
- Dot Pitch: 0.107 x 0.370 (WxH)mm.
- Power Source: 12V DC, 1.16 Amps, 14Watts approx. AC Adaptor: 100-240V 50/60Hz 1.5Amps.
- Dimensions: 489 x 131.82 x 66. 19" Rack by 3U High. Carton: 510 x 215 x 180. (WxHxD)mm.
- Weight: Unit: 2.12Kgms, Carton: 3.0Kgms. • Temp: Operation: -20°C~ 85°C, Storage: -30~ 85°.

Connections: Each Monitor: VGA: 15 pin Sub-D socket. Video In 1 & 2: BNC. Video Out: BNC
Single DC input: 2.1mm socket. AC adaptor: IEC socket.

Standard accessories: AC adapter, UK AC Mains Lead.

- All information correct at time of going to press. Design and specification are subject to change without prior notice. E&EO