


DA314-1K1-1K1

Resistor pack

Two resistors pre-wired, *as below*.

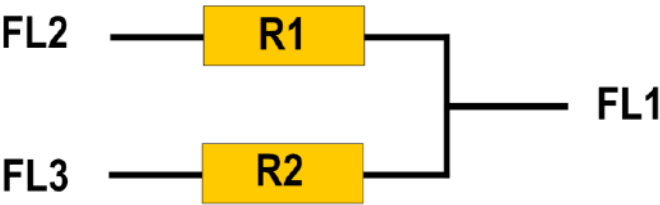

Connections	
FL1	Fly lead – Black 100mm
FL2	Fly lead – Orange 100mm
FL3	Fly lead – Orange 100mm
R1	1K1Ω
R2	1K1Ω
Environmental	
Operating temperature	-10°C to +40°C
Storage temperature	-20°C to +50°C
Operating relative humidity	Maximum 95% non-condensing
Dimensions*	
Width	10mm
Height	18mm
Depth	4mm
Weight	< 0.005Kg
Enclosure material	Polyolefil heat shrunk insulation
Finish	Black
Other	
Estimated mean time before failure (MTBF)	50,000 hours
CE Approved	Yes

*(+/- 2mm)

The enclosed information is believed to be correct. Information may change 'without notice' due to product improvement. Users should ensure that the product is suitable for their use. E&OE. Registered Proprietor: Benham (General Engineers) Ltd (No. 1181752) Registered at 3 Galliford Road Industrial Estate, Heybridge, Maldon, Essex CM9 4XD, UK. Directors: R.A.Scott, K.E.Horwood, T.J.Scott, N.J.Scott. VAT Reg. GB 28276273 Tel:+44(0)1621 856 850 Fax:+44(0)1621 856 162 sales@dantech.uk.com