



MICRO MAGNETIC LOCK (300LB)



MAGNETIC LOCK

Fire tested range of maglocks and brackets from a market leader in access control.

FIRE TESTED to BSEN1634-1-2014
(30, 60, 90 & 120 min timber door-sets)



ML300

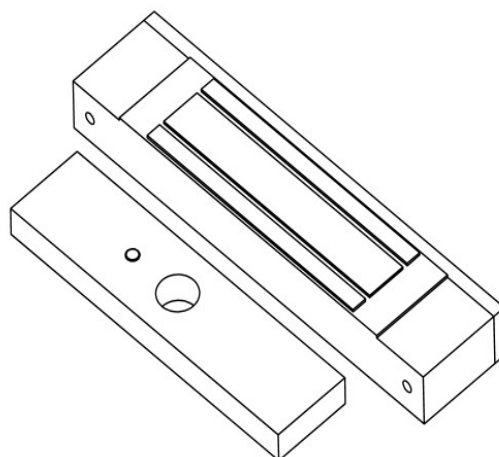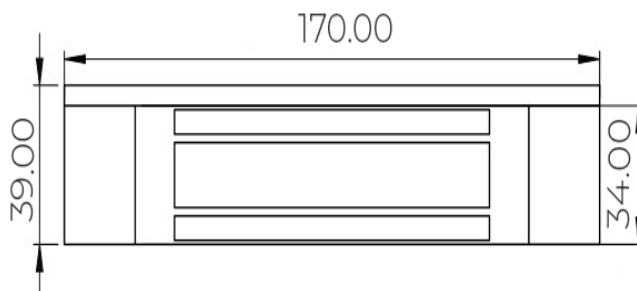

SPECIFICATION

- ML300
- Aluminium housing
 - 12 VDC @ 300mA
 - 180kgs (300lb) holding force
 - Built in surge protection
 - Surface mount
 - Fail safe operation (power to lock)
 - +/- 15% voltage tolerance
 - -10° to +50° operating temperature
 - Push off release pin on armature

FEATURES

- ML300
- Fire rated (30, 60, 90 & 120 min timber door set)
 - Slim line micro magnet
 - Clean and compact design
 - No residual magnetism

Suitable Brackets/Housings:

- BK300ZL
- AH300

OTHER PRODUCTS

120ISM-1



KP1000



EBGB/AP/PTE



EDR-2



DIMENSIONS

- ML300
- 170x39x21 (mm) Maglock
 - 130x31x11 (mm) Armature
 - 1.06kg Boxed
 - 610g Unboxed

CONTENTS

- ML300
- Slimline mini magnet (300lb)
 - Armature plate
 - 300GB fixing kit
 - Instructions
 - Armature fixing template

