

RV Brackets and Accessories


RV-Brackets

RV-WALL-G RV-WALL-B RVIP-WALL-G RVIP-WALL-B

Available in light grey or black, the Redvision Wall Bracket provides elegant mounting for the X-SERIES camera range. This bracket is suitable for mounting the X-SERIES cameras in a conventional dome hanging configuration.

Specification

- Aluminium die cast bracket-polycarbonate covers
- 4" PCD standard fixing positions
- 3 metre flying lead (custom lengths available)
- Cabling: M20 standard gland entry point or through base
- Colours: RAL 7035 light grey. RAL 9005 black or custom RAL
- Weight: 1.1kg

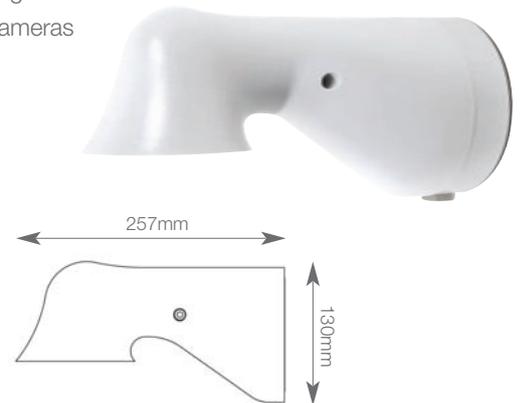


RV-EXT-WALL-G RV-EXT-WALL-B RVIP-EXT-WALL-G RVIP-EXT-WALL-B

The Redvision Extended Wall Bracket provides elegant heritage styling, being constructed from heavy duty tubular steel and cast aluminium. The bracket is suitable for mounting an X-SERIES camera in traditional dome hanging configuration, alternatively, inverting the bracket enables upright Ball PTZ configuration.

Specification

- Tubular steel and aluminium die cast construction
- 3 mounting positions 8mm clearance
- Bracket supports both hanging and upright camera mounting
- 4 metre flying lead (custom lengths available)
- Cabling: M20 standard gland entry point or through base
- Colours: RAL 7035 light grey. RAL 9005 black or custom RAL.
- Weight: 2.6kg

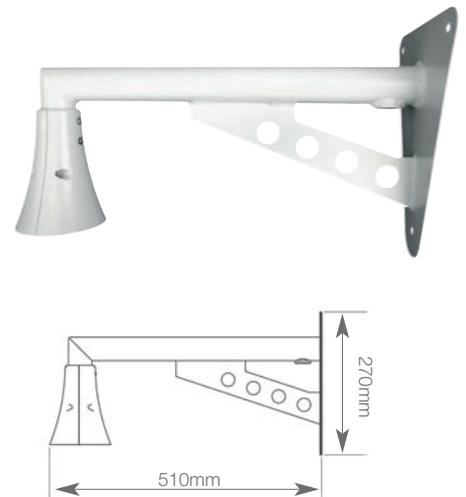

RV-COMP-WALL-G RV-COMP-WALL-B RVIP-COMP-WALL-G RVIP-COMP-WALL-B

The Redvision Compact Wall Bracket is constructed of tubular steel and aluminium die castings. The bracket is suitable for mounting on X-SERIES camera in traditional dome hanging configuration, alternatively, inverting the bracket enables upright Ball PTZ configuration.

Specification

- Tubular steel and aluminium die cast construction
- Fixing slots on a 4" PCD, clearance for 6mm bolts
- 4 metre flying lead (custom lengths available)
- Cabling: M20 standard gland entry point
- Colours: RAL 7035 light grey. RAL 9005 black or custom RAL
- Weight: 1.6kg




RV-SWAN-G RV-SWAN-B RVIP-SWAN-G RVIP-SWAN-B

The Redvision Swan Neck provides traditional type mounting of an X-SERIES camera in dome configuration. The mechanical interface has 4" PCD slots compatible with industry standard CCTV masts and towers.

Specification

- Aluminium die cast and steel construction
- Zinc plate and powder coat finish
- Fixing slots on 4" PCD, clearance for 6mm bolts
- 10 metre flying lead (custom lengths available)
- Cabling: M20 standard gland entry point or through base
- Colours: RAL 7035 light grey. RAL 9005 black or custom RAL.
- Weight: 4.5kg

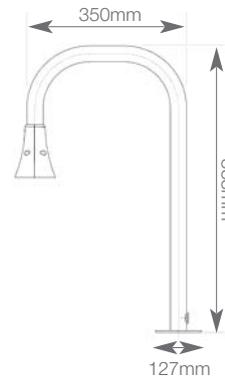


**** RV-PED-G RV-PED-B RVIP-PED-G RVIP-PED-B**

Available in light grey or black (custom colours to special order), the Pedestal Bracket is designed for upright mast/tower mounting of the X-SERIES camera range. An X-SERIES camera mounted upright on the Pedestal Bracket provides full 360 degrees surveillance with no blind spots.

Specification

- Aluminium die cast and steel construction
- Zinc plate and powder coat finish
- Fixing slots on standard 4" PCD, clearance for 6mm bolts
- 10 metre flying lead (custom lengths available)
- Cabling: M20 standard gland entry point or through base
- Colours: RAL 7035 light grey. RAL 9005 black or custom RAL
- Weight: 1.3kg




** Not suitable for dynamic applications (see Dynamic Mount below)

RV-PNDT-G RV-PNDT-B RVIP-PNDT-G RVIP-PNDT-B

Available in light grey or black (custom colours to special order) the Pendant Bracket facilitates X-SERIES camera mounting under a canopy in dome hanging configuration. Custom length Pendant Brackets to special order.

Specification

- Aluminium die cast and steel construction
- Zinc plate and powder coat finish
- Fixing slots on standard 4" PCD, clearance for 6mm bolts
- 4 metre flying lead (custom lengths available)
- Cabling: M20 standard gland entry point or through base
- Colours: RAL 7035 light grey. RAL 9005 black or custom RAL.
- Weight: 1.3kg




RV-DYNAMIC-MT-G RV-DYNAMIC-MT-B

The Dynamic Mount Pedestal from Redvision provides a rugged mounting option typically used on Rapid Deployment Systems.

Safety Warning: X-Series cameras have not been vibration mount certified to comply with moving vehicle installs. If the camera is installed on a moving vehicle, or a rapid deployment rig, a secondary safety system must be deployed. Typically this could be a transportation cage over the camera. Risk assessments must be undertaken by the installer.

Specification

- Heavy duty steel construction
- Zinc plate and powder coat finish
- 10 metre flying lead (custom lengths available)
- Cabling: M20 standard gland entry point or through base
- Colours: RAL 7035 light grey. RAL 9005 black or custom RAL
- 100mm version without gland entry option
- Weight: 1kg




RV-Accessories

RV-EXT-CNR-G RV-EXT-CNR-B

The Redvision Extended Corner Bracket when used in conjunction with the RV-EXT-WALL & RVIP-EXT-WALL Bracket provides elegant external corner mounting for X-SERIES cameras. The bracket can be mounted to support cameras in both dome and upright PTZ configurations.

Specification

- Heavy duty powder coated steel construction
- 10 metre flying lead (custom lengths available)
- Cable managed through bracket
- Interfaces with RV-EXT-WALL & RVIP-EXT-WALL Bracket
- Colours: RAL 7035 light grey. RAL 9005 black or custom RAL
- Weight: 3.5kg





RV-CNR-G RV-CNR-B

The Redvision Corner Bracket when used in conjunction with the RV-WALL & RVIP-WALL Bracket provides elegant external corner mounting for X-SERIES cameras in dome hanging configuration.

Specification

- Heavy duty powder coated steel construction
- Cable managed through bracket
- Interfaces with RV-WALL & RVIP-WALL Bracket
- Colours: RAL 7035 light grey. RAL 9005 black or custom RAL
- Weight: 1.5kg

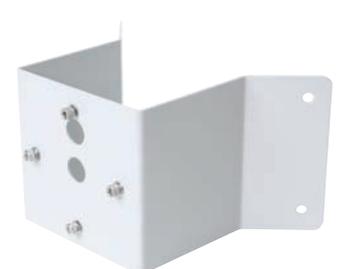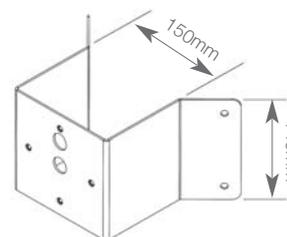

RV-POLE-G RV-POLE-B

Redvision's External Double Pole Clamp Bracket fixes to pole diameter range 60 to 90mm. To facilitate mounting an X-Series camera to the Pole Bracket an RV-WALL, RVIP-WALL, RV-COMP-WALL or RVIP-COMP-WALL Bracket is also required.

Specification

Heavy duty steel plate construction

Zinc plate and powder coat finish

Clamps to poles 60-90mm

Bracket supports up to 2 cameras

Colour: RAL 7035 light grey. RAL 9005 black or custom RAL

Weight: 1.5kg



RV-VISOR-G RV-VISOR-B

RV-Visor option available for cameras installed as upright PTZ's. The visor protects the camera from sun glare, rain and dirt build-up forming on the window. The visor improves picture quality in challenging environments and reduces cleaning requirements.

Specification

Powder coated aluminium construction

Factory fit option or retro-fit

Protects window against sun glare and rain

Colour: RAL 7035 light grey. RAL 9005 black or custom RAL

Weight: 0.1kg



RV-WASH

Redvision's Washer Nozzle option is mounted to the camera Pedestal Bracket as shown. Compatible with standard CCTV wash pump systems, the control is via a dedicated relay output on any Redvision Alarm PSU.

Specification

Stainless steel construction

Wash output control via Redvision Alarm PSU

Position for wash controlled via preset

System compatible with standard wash pumps

Weight: 0.1kg

