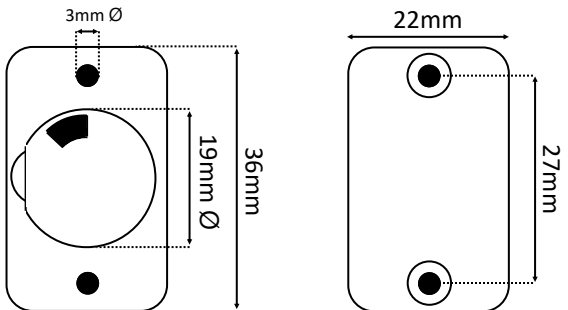
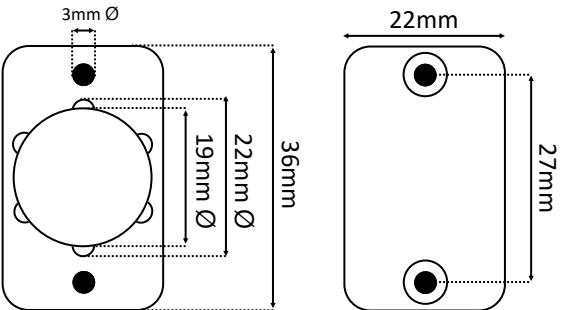
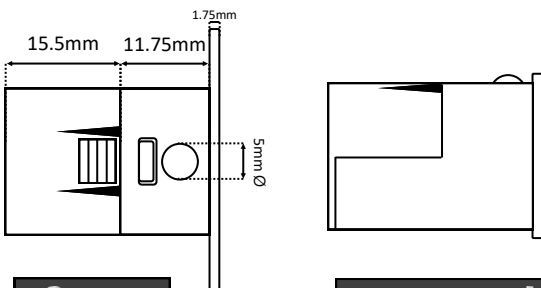
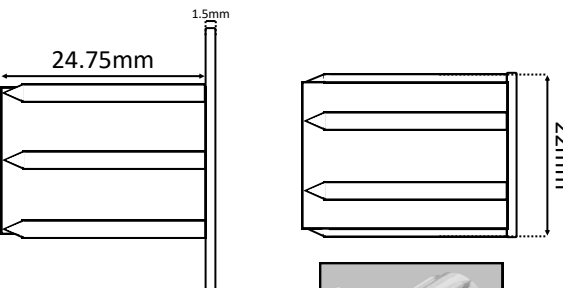

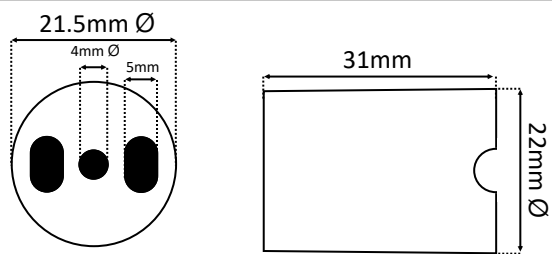
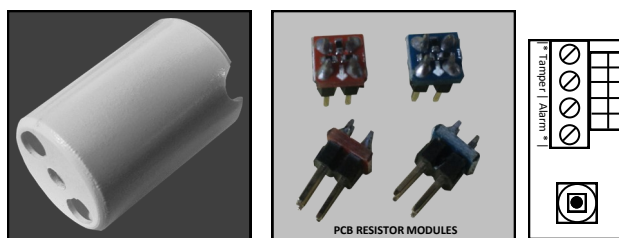
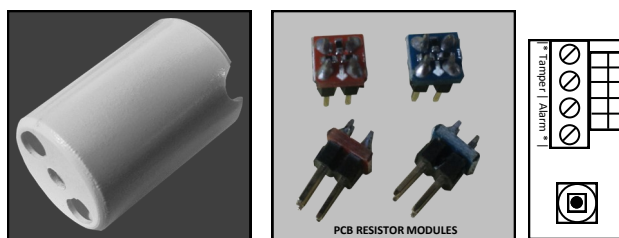


FRONT/ BACK	CONTACT 	MAGNET 	DESCRIPTION Grade 3, Class II 4 terminal flush contact +resistors. Rectangular plate. Fire retardant. Single reed, normally closed. <i>(complete circuit when magnet present).</i> ACTIVATION Reed switch, ~14mm operating gap. Selectable resistor modules: EOL: 1k, 2k2, 4k1, 4k7, 5k6, 10k. ALM: 1k, 2k2, 4k1, 4k7, 5k6, 6k8, 10k. Microswitch tamper.
SIDE / END			Magnetic tamper reed switch. WIRING As marked on PCB. Use * terminals for supervised loop. MATERIALS LG Chem AF-312 ABS, Flame Retardant, Hi Impact, Hi Flow UL94 flammability. Ferrite/Alnico V magnet. Rhodium reed. TEMPERATURE RANGE -40 to +50 degrees Celsius.
PHOTO			ELECTRICALLY RATED AS FOLLOWS 500mA Max DC. 500mA Max AC. 1 – 100v DC. 125v AC Max.
COVER / PCB			COVER / PCB 
KNIGHT FIRE & SECURITY Unit 84 Seawall Road Ind. Estate Cardiff UK CF24 5TH Tel: +44 (0) 2920 488 129 Fax: +44(0) 2920 489 132 Drawing #: XA41MULTIFR Drawn: Gareth Carpenter Date: 01/07/2020 Revision: 1 All dimensions in mm Do not scale © Knight Fire & Security Products Ltd All cases of infringement will be pursued.			