


S1709STS Two position keyswitch



Flush fitting stainless steel engraved two position keyswitch. This is a double pole unit with change over contacts and a single pole normally open Tamper Switch.

- Brushed Stainless Steel
- Supplied with 38mm deep galvanised mounting box for flush fitting
- IP Rated
- Customised versions available on request
- Surface mount using S0610

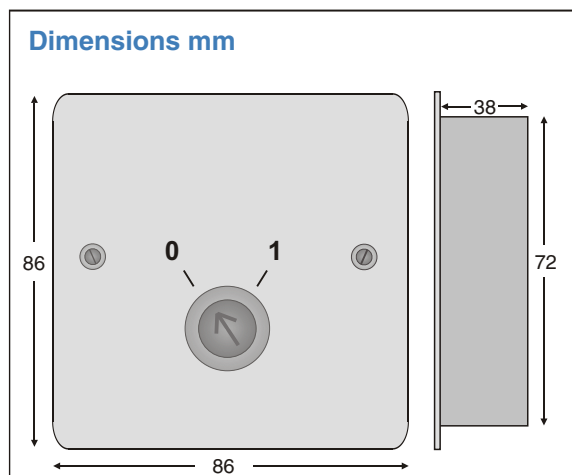

Specification	S1709STS
Led Current	N/A
Switch Contacts	DPCO 2A@ 30vdc
Visual Indication	N/A
Integral Sounder Level	N/A
Tamper	YES - Single Pole Normally Closed
Material	304 Grade Stainless Steel
Dimensions	86mm x 86mm x 2mm (Facia) 38mm galvanised back box supplied
Weight	0.28kg
IP Rating	IP54 - To maintain the IP rating a suitable sealant or gasket for the rear of the plate is required
Approvals	CE and RoHS compliant

Available as:	S1709 Range of Keyswitches
S1709SM	Two position momentary action keyswitch
S1709ST0	Two position keyswitch trapped in the OFF position
S1709ST1	Two position keyswitch trapped in the ON position
S1709S	Two position keyswitch Stainless steel



Related Products



Hoyles Electronic Developments Ltd

T. 01744 886600

F. 01744 886607

E. sales@hoyles.com

W. www.hoyles.com

