

Praetorian Guard

4G-IP Video Intercom



Praetorian Guard IP Intercom complete with 4G access point. The access point will provide an internet connection via a compatible SIM card*

- Speak to your visitors from anywhere in the world.
- Grant access remotely - Send a command to the gate motor via the app to open your gates etc.
- Keypad Codes – 24-7 / Timed / Temporary (Optional)
- No Touch Access - PROX Cards/ Tags - 24-7 / Timed / Temporary (Optional)
- Voicemail - Visitors can leave a video messages when unanswered.
- Multi-User - Add up to 8 maximum devices per Intercom ID. (incl ADMIN user. 4 maximum for optimal performance.)
- Wifi/LAN cable (Dualband WIFI. 2.4 & 5.8G wifi (IEEE 802.11 b/g/n/a/c) can also be connected to a local Network.
- Volume of external speaker adjustable at the call-point.
- Vodafone SIM include for convenience. (UK/IRL markets only)

* MIN 1.5MB UPLOAD.


* MIN 1GB P/MIN DATA (Depending on usage).





Installer / User App

App images for illustrative purposes only.

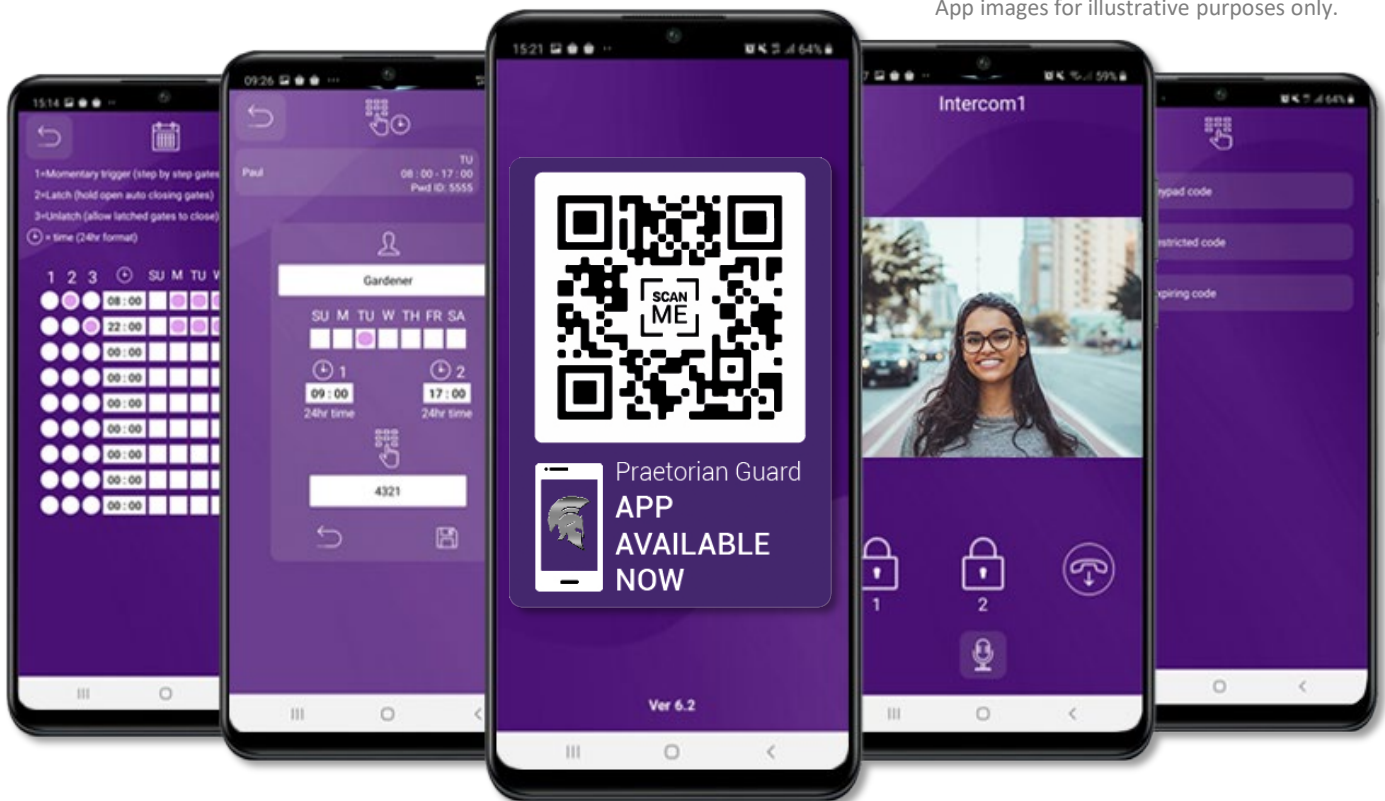

Events log for Keypad codes, Calls, Voicemails, Prox ID's. (past 100)



7-day schedule for auto relay opening.



Notifications for calling, relay triggers (prox, keypad codes, in app latching, scheduled latching/unlatching etc.



Sync device time to device.



Prox & Keypad codes added via App.



View your camera in full screen mode.



- **System can work with smartwatches however notifications may vary due to smartwatch brand & capabilities.**





*Moving objects & changing weather may trigger sensor.



Praetorian Guard - Technical Details



GENERAL	
Front Panel	Portrait Orientation AB/ABK = 3mm Acrylic on Architectural Design Marine Grade Stainless Steel BS316 Front Plate. AS/ASK = 3mm Marine Grade Stainless Steel BS316 on Architectural Design Marine Grade Stainless Steel BS316 Front Plate. FS/FSK = Flush Design Marine Grade Stainless Steel BS316 Front Plate. IMP/IMPk = 3mm Acrylic on Imperial Design Marine Grade Stainless Steel BS316 Front Plate. Modular = Powder Coated Marine Grade Stainless Steel BS316 Front Plates with 3mm Acrylic on Design Marine Grade, Stainless Steel BS316 Modular Plates. Landscape Orientation PED = Pedestal Surface Mount
Hood Cover (MOD, IMP(K), PED versions)	Powder coated Aluminium
Mounting Housing (Backbox)	Marine Grade Stainless Steel BS316
Mounting Type	Surface-Mounted with backlighting, Flush-mounted version sold separately
Call Button	Stainless-steel button with illuminated LED Ring
Weatherproof	IP55
Approvals	CE, FCC
Dimensions	See Overview of Call Points
Operating Temp.	-25 to +55°C / -13 to 131°F
Power Supply	24V DC
Power Consumption	IP PCB w/Keypad & Prox Standby = 80mA Operating = 300mA
Solar Power	45Watt Solar Panel (minimum) 2x 12V 15AH Batteries connected in series to provide 24V output
Connectors	LAN (RJ45) 2 x Bistable latching relay, max. 1-28V DC/AC, 1A, e.g. for magnetic door lock External input for push to exit button 24V DC input (+, -)
System Requirements	Mobile device: Newest iOS on iPhone/iPad, newest Android on Smartphone/Tablet Internet: High-Speed Landline Broadband Internet connection, DSL, cable or fibre optic, no socks or proxy server. Min. suggested upload speed of 1.5mbps, Network: Ethernet Network, with DHCP / WIFI 2.4GHz/5.8GHz (with applicable antenna)
Recommended Installation Height	Camera lens should be at a min. height of 145 cm (57 in). Before the installation please determine your optimal installation height.
Warranty	See www.aesglobalonline.com/warranty

KEYPAD MODULE	
Power Supply	24V DC
Steel Keypad Module	12 Square Silicon Keys Blue illumination Keypad Codes configurable via App, Slave connection to allow up to an additional 8 slave devices
Silicon Keypad Module	12 Round Silicon Keys Blue illumination Keypad Codes configurable via App, Slave connection to allow up to an additional 8 slave devices

THIRD-PARTY INTEGRATIONS	
Partners	N/A - Coming Soon
API	N/A - Coming Soon

VIDEO	
Camera	HD 720p, dynamic (VGA – HD)
Lens	120° (D), 109° (H), 65° (V) IR-capable
Display Resolution	Switchable in the app by the Admin user. HD resolution: 1280*720 SD resolution: 640*480
Video Codec	H264
Night-Vision	Yes, light sensor, automatic IR-cut filter, 5 Infrared LEDs
Storage	On-Board Micro SD Card (16GB included) Max read capacity 32GB Estimated capacity based on 16GB: 5,592 Video Clips (3MB) {AVI.} 33,500 images (0.5MB) {JPG} Supports Hot Swapping. Auto overwrites oldest data at 80% capacity FAT32 Formatting

MOTION SENSOR	
Type	Active
Detection Type	Digital (Pixel-based) Changes of pixilation. This is processed by the CPU identifying any major/minor changes in pixels that is defined by a predetermined algorithm.
Range	>5m, depends on environment, distance is fixed

AUDIO	
Audio Components	Speaker and microphone, noise reduction and echo cancellation (ANR, AEC)
Audio Streaming	Two-way, full duplex & half-duplex (switchable in-app)
Audio Codec	PCM/ARAW

NETWORK	
WiFi	IEEE 802.11a/b/g/n/ac
WiFi Security	WPA / WPA2 / WPA3
Frequency Range	2.4GHz-2.4385GHz; 5.15GHz-5.845GHz
Ethernet	IEEE 802.3
Supported Protocols	HTTP, HTTPS, SSL/TLS, Bonjour, DNS, RTSP, RTP, TCP, UDP, RTCP, ICMP, DHCP, ARP

4G ROUTER	
Power Supply	24V DC
Interface	Custom OpenWrt
Antenna Type	SMA
SIM Tray	NANO
LAN Ports	2 x 10/100 Mbps - LAN/WAN
Direct Cable Connection	8 Pin Spring Connector Terminal Block (Linked to 1 x LAN ports)
GSM Modem Models	4G Europe - SIM7600E 4G USA - SIM7600A 4G AUS/NZ - SIM7600SA
Frequency Range	LTE-TDD = B38/B40/B41 LTE-FDD = B1/B3/B5/B7/B8/B20 UMTS/HSPA+ = B1/B5/B8 GSM/GPRS/EDGE = 900/1800MHz
RF Output Power (EIRP)	32.55dBm (GSM 900), 29.73dBm (DCS 1800) 23.77dBm (WCDMA Band I), 23.78dBm (WCDMA Band VIII) 22.79dBm, 22.73dBm, 22.97dBm, 22.35dBm, 22.99dBm (LTE B1, B3, B7, B8, B20)



4G MODULAR Intercom

Area code:

EU (Europe)

US (USA)

AU (Australia & NZ)



PRAE-4G-MOD-IB-EU

Modular 1x1 call panel and 4G router. Button with blue lighting.



PRAE-4G-MOD-IBK-EU

1x2 Modular call panel with keypad and 4G router. Keypad/button with blue lighting.



PRAE-4G-MOD-IBPK-EU

Modular 1x2 call panel with **keypad & prox** reader and 4G router. Keypad/button with blue lighting.



PRAE-4G-MOD-IBP-EU

Modular 1x2 call panel with **prox** reader and 4G router. Button with blue lighting.



Built in 4G Module options

Area code:

EU (Europe)

US (USA)

AU (Australia & NZ)

Have the choice of a Module with 4G router built into the Modular Unit.

PRAE-4G-MOD-IB-ROUTER-EU

Modular 1x2 call panel.
With 4G router built in.
Button with blue lighting.



4G Blank Module.



PRAE-4G-MOD-IBK-ROUTER-EU

Modular 1x3 call panel,
4G router built in &
keypad. Keypad/button
with blue lighting.



4G Blank Module.



PRAE-4G-MOD-IBPK-ROUTER-EU

Modular 1x3 call panel. 4G
router built in, keypad & prox
reader. Keypad/button with
blue lighting.



4G Blank Module.



Prox reader &
Keypad Module



PRAE-4G-MOD-IBP-ROUTER-EU

Modular 1x3 call panel. 4G
router built in & prox reader.
Button with blue lighting.



4G Blank Module.



Prox reader
Module





Area code:
EU (Europe)
US (USA)
AU (Australia & NZ)

PRAE-4G-IB-EU



PRAE-4G-IBK-EU



Contemporary cool-white illuminated buttons. Marine grade, brushed stainless steel construction with gloss acrylic trim and powder coated aluminium hood. (Kit includes speech panel, 4G modem, power supply and install manual)
Prox panel: PRAE-4G-IBPK-EU

PRAE-4G-AB-EU



PRAE-4G-ABK-EU



Blue back lighting effect. Marine grade, brushed stainless steel construction with gloss acrylic trim. (Kit includes speech panel, 4G modem, power supply and install manual)
Prox panel: PRAE-4G-ABPK-EU


PRAE-4G-AS-EU



PRAE-4G-ASK-EU




Architectural model with contemporary white illuminated buttons. Marine grade, brushed stainless steel construction. (Kit includes speech panel, 4G modem, power supply and install manual)
Prox panel: PRAE-4G-ASPK-EU

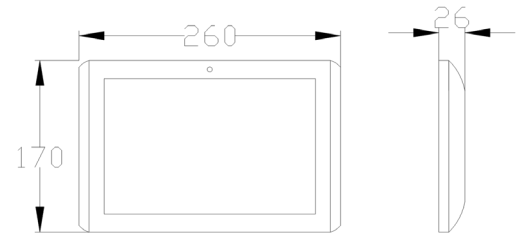


MON-11

- Wall mount touch screen monitor (1280x800 Resolution), compatible with the **Praetorian system**.
- 10.1 inch screen IPS LCD android screen.
- Wifi, Ethernet & Bluetooth connections.
- POE supplied (12V DC can be purchased separately)
- Complete with wall mount bracket.
- Android OS (8.1) with Praetorian app pre-loaded.
- RK3288, Quad-core cortex A17, 1.6G.

Call Panel Dimensions

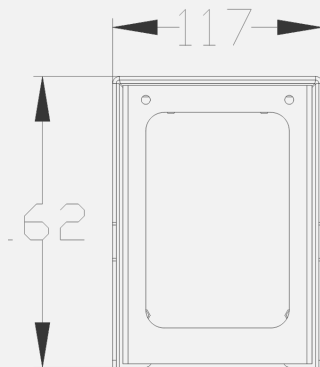


MOD-1X1 (MODULAR)

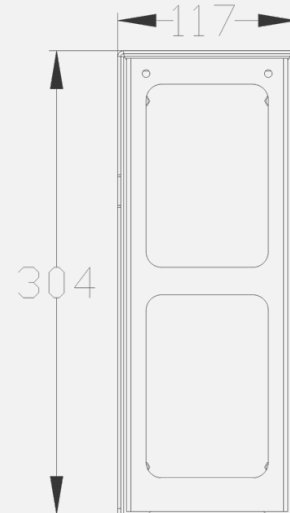


MOD-1X2 (MODULAR)

PRAE-4G-IB Call Panel

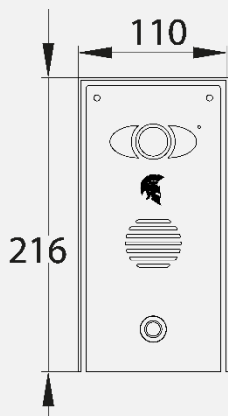

PRAE-4G-IBK Call Panel

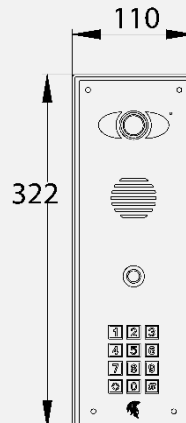

PRAE-4G-AB & AS Call Panel

