



# ARN-410S

4CH NVR



## Key Features

- Up to 4 channels @ 8MP resolution
- H.265, H.264, MJPEG codec
- 40Mbps network camera recording
- Plug & play with 4 PoE ports
- 1 HDD (Up to 6TB)
- HDMI output
- P2P service (QR code connect) for easy remote access with Wisenet Viewer & Wisenet Mobile
- Dual track recording, 4K HDMI monitor out

# ARN-410S

4CH NVR



## Specifications

Display		
Network camera	Inputs	Max. 4CH
	Resolution	8MP ~ CIF
	Protocols	SUNAPI, ONVIF
Decoding	Local Display	HDMI
	Multi Screen Display	[Local Monitor] 1/ 2V/ 2H/ 3V/ 4/ Sequence [Web] 1/ 2V/ 2H/ 3V/ 4
	Resolution	[Local Monitor] 8M(30fps), 1080p(120fps), 720P(120fps), D1(120fps)
Performance		
Operating System	Embedded	Linux
Record	Compression	H.265, H.264, MJPEG
	Recording Bandwidth	Max. 40Mbps
	Resolution	8MP ~ CIF
	Mode	Normal, Dual Stream, Schedule(Continuous/Event), Event (Pre/Post), Bookmark
	Event Trigger	Alarm Input, Video Loss, Camera Event(Sensor, MD, Video Analytics, Defocus, Audio), Dynamic Event
	Event Action	e-Mail, Event Push, PTZ Preset, Alarm Out, Buzzer, Monitor Out
Search & Play	Playback Bandwidth	Max. 32Mbps
	User	Max. 4 Users (Local 1, Remote 3)
	Simultaneous playback	Max. 16CH(Local 4CH, Remote 4CH per user)
	Mode	Date & Time(Calendar), Event list, Text Search, Smart Search
	Resolution	CIF ~ 8MP
	Playback Control	Fast/Slow Forward / Backward, Move one step Up / Down
Storage	Supported HDD	Up to 6TB
	HDD Slot	SATA 1ea(Max. 6TB)
Backup	File backup	BU/Exe(GUI), JPG/AVI(Network)
	Function	Multi channel(Up to 4CH) Play, Date-Time/Title display
Network		
Protocol	IPv4, IPv6, TCP/IP, UDP/IP, RTP (UDP), RTP (TCP), RTSP, NTP, HTTP, DHCP (Server, Client), SMTP, ICMP, IGMP, ARP, DNS, DDNS, uPnP, HTTPS, SNMP, ONVIF (Profile-S), SUNAPI(Server, Client)	
DDNS	Hanwha DDNS	
Transmission Bandwidth	Max. 40Mbps	
Audio	Input/Output	4 CH(network)
	Compression	G.711, G.726, AAC(16/48KHz)
	Audio Communication	2-Way

Design and specifications are subject to change without notice. The latest product information / specification can be found at [HanwhaVision.com](http://HanwhaVision.com)

Hanwha Vision is formerly known as Hanwha Techwin.

Max Remote Users	Search(3), Live Unicast(10), Multicast(20)	
Security	IP address filtering, User access Log, 802.1x, Encryption Device certificate(Hanwha Techwin Root CA), Signed firmware	
Web viewer	Supported OS	Windows 10, macOS 10.13
	Supported browser	Google Chrome, Microsoft Edge, Mac Safari
Viewer Software	WAVE, SSM, Webviewer, Wisenet Viewer, Wisenet mobile Support CGI(SUNAPI) for integration to 3'rd party VMS	

<b>Functions</b>		
Camera Setup	Register	Auto, Manual
	Item	IP address, Add profile edit, Bitrate, Compression, GOP, Quality, Camera MD setup (4, 8 point polygon) Camera video setup (Simple focus, Brightness/Contrast, Flip/Mirror, IRIS, WDR, D&N, SSNR, Shutter, SSDR, DIS), Fisheye Dewarping Mode, Hallway View Setup, Camera Webpage
PTZ	Control	Via GUI, Webviewer
	Preset	300 Presets
Smart phone	Support Model	iOS, Android
	Protocol Support	RTP, RTSP, HTTP, CGI(SUNAPI)
	Control	Live 4CH(Multi-Profile Support), Playback 4CH
	Max. Remote Users	Search(3), Live Unicast(10)
Redundancy	Failover	N+1
	ARB	Support
Easy configuration	P2P(QR code)	

<b>Interface</b>		
Front	Indicator	Power, Record, Network
Reset	Support	
HDMI	1EA 3840x2160 30Hz	
Ethernet	PoE RJ-45(LAN, 10/100) 4 ea ,RJ-45 1ea (WAN, 10/100)	
USB	2EA(Front 1 x USB 2.0, Rear 1 x USB 2.0)	
Power inlet	DC Adaptor	

<b>System</b>		
Log	Log List	Max. 100,000 (System Log, Event Log each)
System Control	Mouse, Web	
Language	English, French, German, Italian, Spanish, Russian, Turkish, Polish, Dutch, Swedish, Czech, Portuguese, Danish, Rumanian, Serbian, Croatian, Hungarian, Greek, Norwegian, Finnish, Korean, Chinese, Japanese, Thai, Vietnamese	

<b>Environmental</b>		
Operating Temperature	0°C to +40°C(32°F to 104°F)	
Operating Humidity	20% ~ 85% RH	

<b>Electrical</b>		
Power Input	54VDC / 1.20A	
Power Consumption	Max 52W (1HDD, PoE On)	
PoE Budget	35W	

<b>Mechanical</b>		
Color / Material	Black / Metal	

Design and specifications are subject to change without notice. The latest product information / specification can be found at [HanwhaVision.com](http://HanwhaVision.com)

Hanwha Vision is formerly known as Hanwha Techwin.

Dimension (WxHxD)	W300.0 x H47 x D208.7mm (1U)
Weight	1.03Kg


# ARN-410S


4CH NVR



CAD

Unit:mm [inch]

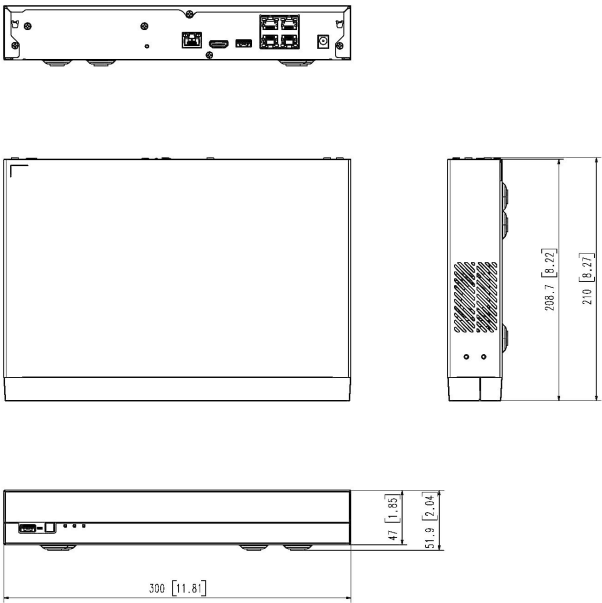

3		
2	ARN-410S	'21.12.16
1	QRN-430S	'21.06.01
No.	MODEL NAME	DATE
Unit:mm[inch]		SCALE:1/2
 Hanwha Techwin		

© Hanwha Techwin Co.,Ltd. All rights reserved.