


EB250 Solenoid bolt

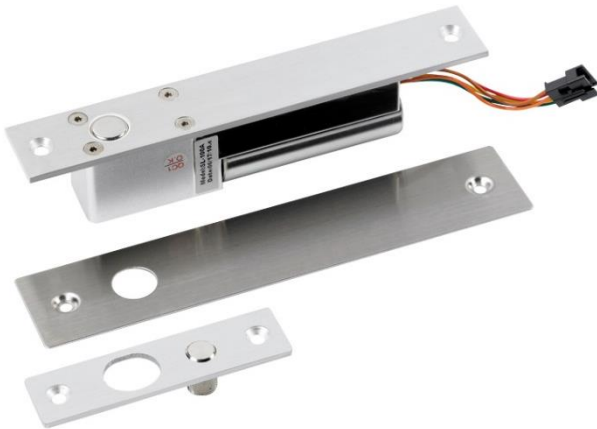


This flush mount solenoid bolt provides a reliable and secure means of locking at low cost. The adjustable auto-lock delay feature allows the door time to settle before trying to lock.

Features

- Fail Safe (= Power to lock)
- Mortice fitting
- Adjustable auto-lock delay feature
- Stainless steel fascia plate included
210mm(L) x 42mm(W) (optional fitment)
- Low standby/holding current
- Door position monitoring

Technical Information

- Voltage: 12Vdc
- Current draw: 900mA activating current
360mA holding current
- Auto lock delay settings: 0s, 2.5s, 5s, 9s
- Dimensions: Main body: 200mm(L) x 32mm(W) x 40mm(D)
Keep plate: 90mm(L) x 26mm(W) x 7mm(D)
Bolt: 15mm dia. x 16mm throw
- Door position monitoring switch (COM and NO contacts)

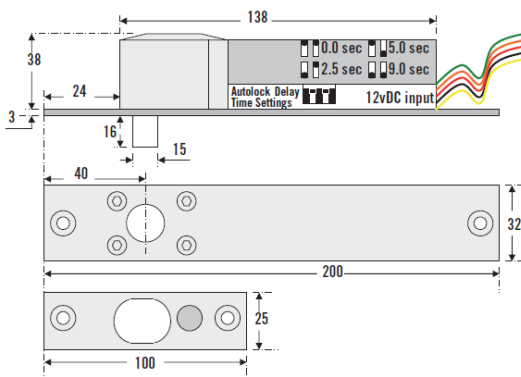

Related Products

SPB001(B)



CP22(B)



PSU2A-12



DG500

