2C2 - 72mm lockcases (55mm backset)

L2C26

Euro Profile Mortice Escape Sash Lock



Application:

- · For timber doors hinged on the left or right
- Also suitable for steel & composite doors special fixings required
- Sprung bolt-through lever handles must be used with this lock

Specification:

- European style casing which accommodates most euro profile cylinders
- Single throw deadbolt gives 16mm projection when key is turned once
- Latch bolt withdrawn by sprung lever handle from both sides
- Dead and latch bolt withdrawn simultaneously in a single operation by sprung inside lever handle
- Lock functionality is reliant on the users ability to correctly operate the lever handles
- Easily reversible handing of latch bolt and escape mechanism
- Available with radiused or square forend and strike
- Supplied with split spindle to suit the majority of lever handles

Case size: 83mmBackset: 55mm

Case: Steel, black powder coatOuter Forend: See finishes below

• Striking Plate: Finished to match outer forend

Deadbolt: Stainless steelLatch Bolt: Stainless steel

• Follower: Zinc, 8mm

Rebate Kit: J2C2-REB (13 & 25mm sizes), only available

• Cylinder Type: Euro profile (not supplied)

Finish:

• SS - Stainless Steel









Standards:

- Tested to BS EN 12209 : 2003 3 M 4 1 0 F 2 B C 2 0
- EN 1634-1 assessed for use on 30 and 60 minute timber fire doors
- EC Certificate number: 0832-CPD-6046
- Assists in fulfilling duties required under the Equality Act (EA)
- Satisfies recommendations of BS8300 and Approved Document M (ADM)






2C2 - 72mm lockcases (55mm backset)

L2C26

Euro Profile Mortice Escape Sash Lock



Technical Design:

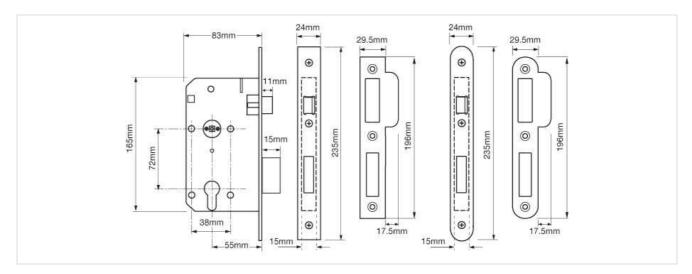

Variants:

Code	Description
JL2C26R-SS55	L2C26 Euro Profile Mortice Escape Sash Lock (2C2)
JL2C26S-SS55	L2C26 Euro Profile Mortice Escape Sash Lock (2C2)