

Two Position Waterproof Keyswitch with Tamper Switch

S1709WP-TS


Flush fitting single gang wall mounting stainless steel plate with waterproof keyswitch and lid tamper switch.

Supplied with normally closed and normally open contacts for the keyswitch and a normally closed contact for the tamper switch.

| Specification | S1709WP-TS |
|------------------------|---|
| Led Current | N/A |
| Switch Contacts | 1 x N/O and 1 x N/C both 500mA @30vdc |
| Visual Indication | N/A |
| Integral Sounder Level | N/A |
| Tamper | Yes |
| Material | 316 Grade Stainless Steel |
| Dimensions | 86mm x 86mm x 2mm (Facia) 50mm galvanised back box |
| Weight | 0.28kg |
| IP Rating | IP65 – supplied with WG1 Weather Gaskets |
| Approvals | UKCA and CE marked, ROHS compliant |

Benefits and Features

- Brushed Stainless Steel
- Supplied with 50mm deep galvanised mounting box for flush fitting
- IP Rated
- Customised versions available on request
- Surface mount using S0610-65

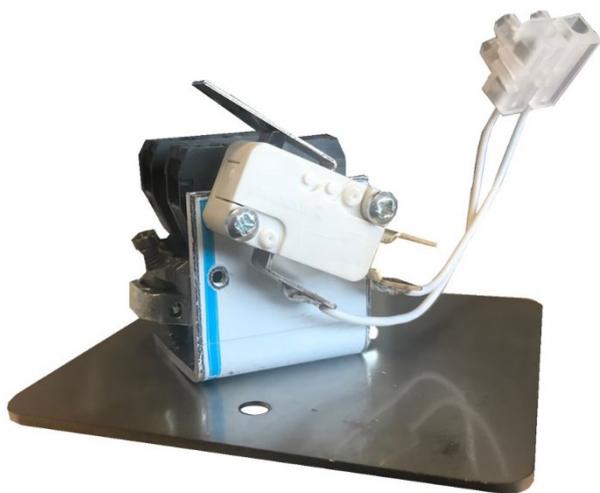

Shown above internal view with tamper switch

Dimensions (mm)

