


HD Analogue Box Camera

VA-X2MP+C



Please note: Lens available separately.

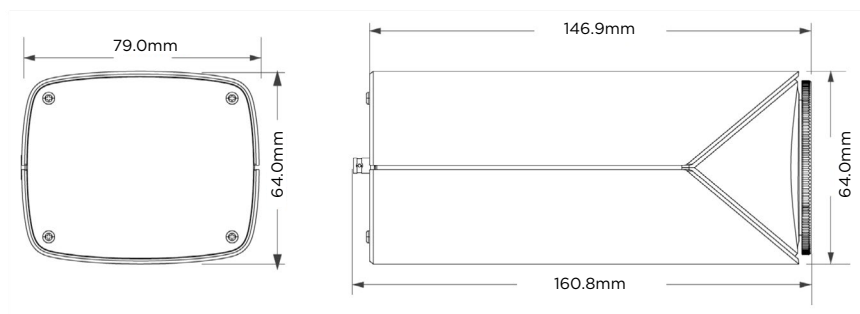

The VA Analogue 1/2.8" 2MP IP Box Camera serves as a visible deterrent whilst offering enhanced image quality through a wide dynamic range feature.

The camera supports quad format analogue video via AHD/TVI/CVI and CVBS using a physical push button to move between connections.

The C/CS* lens mounting gives access to a wide choice of lenses enabling you to accommodate your customer's individual site requirements. This also offers flexibility to update the camera as security needs change, making it an ideal choice for large scale installations.

Additional features include Digital noise reduction, Auto white balance, BLC, Sharpness, Mirror and 13-language support. Includes 24VAC to 12VDC 1A convertor for use on current and legacy systems.

Accompanying the VA series of cameras is the VA series of NDAA compliant analogue DVR recorders.

**Supports CS lenses out of the box, for C Mount lenses a C/CS adapter is required (not included).*

To learn more about Vista's video surveillance products please visit www.norbain.com/brands/vista

KEY FEATURES

2MP Box

AHD/TVI/CVI/CVBS
Video Support

C/CS* lens support

0.001 lux@F1.2
Minimum Illumination

IP54 Ingress Protection

Includes 24VAC to 12VDC
1A convertor



TEL
+44 (0) 118 912 5000

**To scan the QR code, make sure your phone/device has a suitable reader. Most modern Android and iOS smartphone cameras will automatically scan the code and provide the product's URL link, which will open from the device's web browser.






TECHNICAL SPECIFICATION

Model	VA-X2MP+C
CAMERA	
Image Sensor	1/2.8" CMOS Progressive Scan
Max Resolution	2MP
Video Output	AHD/TVI/CVI/CVBS
Min Illumination	Colour: 0.001 lux@F1.2, AGC ON
WDR	DWDR
Shutter Time	Auto; 1/25s-1/50000s (PAL); 1/30s-1/50000s (PAL)
Day/Night Mode	Day/Night/Auto True Day Night IR Cut Filter
Signal/Noise	≥52dB (AGC OFF)
LENS	
Type	C/CS
Iris Control	Auto
VIDEO	
Max. Image Resolution	1920x1080
Image System	PAL/NTSC
Frame Rate	30fps (60Hz); 25fps (50Hz)
OTHER FEATURES	
Digital Noise reduction, Auto white balance, BLC, Sharpness, Mirror, Smart IR, 13-language support	
GENERAL	
Working Condition	-10°C - 40°C, 10% - 90% (relative humidity)
Environment	IP54
Power Supply	DC12V (±15%)
Power Consumption	< 1.0W
Surge Protection	6kV
Dimensions/Weight	160.8×79×64mm/0.444KG
COMPLIANCE	
CE	EMC\RoHS

MODELS IN THIS RANGE

0966660 VA-B2MP28V12IR+C 2MP Bullet 2.8-12mm IR includes 24VAC to 12VDC 1A convertor
0966640 VA-T2MP28V12IR+C 2MP Turret 2.8-12mm IR includes 24VAC to 12VDC 1A convertor
0966630 VA-D2MP28V12IRVR+C 2MP Dome 2.8-12mm IR & Vandal resistant includes 24VAC to 12VDC 1A convertor
0966670 VA-B5MP28V12IR+C 5MP Bullet 2.8-12mm IR includes 24VAC to 12VDC 1A convertor
0966620 VA-T5MP28V12IR+C 5MP Turret 2.8-12mm IR includes 24VAC to 12VDC 1A convertor
0966680 VA-D5MP28V12IRVR+C 5MP Dome 2.8-12mm IR & Vandal resistant includes 24VAC to 12VDC 1A convertor
0966650 VA-X2MP+C 2MP Box camera includes 24VAC to 12VDC 1A convertor

ASSOCIATED PRODUCTS

0898340 13VG2812AS-VI 2.8-12mm F1.4 DD	
0898350 M13VG550IR 5-50mm F1.6 IR 2MP	
0785200 VPSU12-1000E VPSU12-1000E 12VDC 1A, Encapsulated	
0785210 VPSU12-2000e 12VDC 2A Encapsulated	
0785220 VPSU1221EXTe 12VDC 1 x 2A, IP68	

OTHER PRODUCTS

0910670 VA-DVR0405MP 4CH 5MP H.265 HD Hybrid DVR
0910680 VA-DVR0805MP 8CH 5MP H.265 HD Hybrid DVR
0910690 VA-DVR1605MP 16CH 5MP H.265 HD Hybrid DVR
0922960 VM215 HDMI & VGA 21.5" Monitor
0922950 VM32 HDMI/VGA & BNC (CVBS) 32" Monitor
0946300 Diamond4Kv2 All in one CCTV\IP\Cable Test Monitor

