


White LSF 100m 8 Core TCCA Type 3 Alarm Cable

8C-TY3-LSF-WHT-100

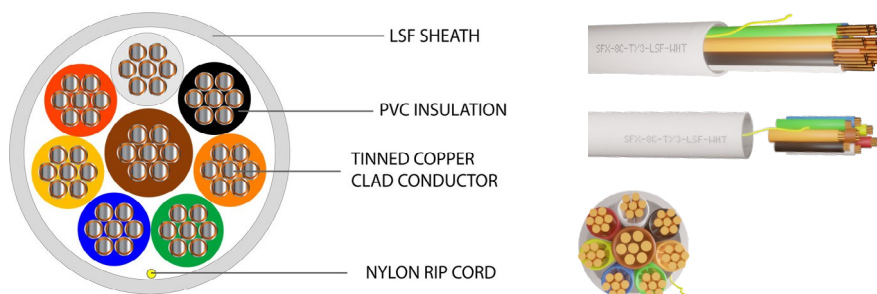

Generally used for connecting alarm equipment such as sensors, control panels and other low voltage circuits.

This ROHS compliant cable benefits from low smoke and fume plastic and is good for use inside public buildings and spaces, as it will not emit toxic gases if the cable catches fire.

This is the most popular and cost effective cable for general intruder alarm solutions, with improved performance and protection against fire.

TECHNICAL SPECIFICATION

Model	8C-TY3-LSF-WHT-100
CABLE CONSTRUCTION	
Cable Construction	8 Cores
CPR	Eca
Conductor	Tinned Copper Clad Aluminium
Conductor Diameter (mm)	0.20 ±0.008 x 7
Stranded Diameter (mm)	0.22
Overall Diameter (mm)	4.00 ±0.200
Compliance and Standards	BS4737-3.30:2015,RoHS2 2011/65/EU
INSULATION	
Insulation	PVC
Insulation Colour	Red,Black,Blue,Yellow,Green,White,Orange,Brown
Insulation Resistance @20°C	>200 MO/km
Insulation Thickness (mm)	0.21
OUTER/JACKET SPECIFICATION	
Jacket	LSF
Overall Colour	White
Overall Diameter (mm)	4.00 ±0.200
Jacket Colour	White RAL 9003
Jacket Thickness (mm)	0.5
Nylon Rip-Cord	Yellow 210D
ELECTRICAL CHARACTERISTICS	
Insulation Resistance @20°C	>200 MO/km
Max Conductor DC resistance @ 20°C	1550/km
Rated Temperature (°C)	-20°C to 80°C
Rated Voltage (V)	30V

MODELS IN THIS RANGE

0966840	6C-TY3-PVC-WHT-100
100m 6 Core TCCA Type 3 Alarm Cable White PVC	
0966850	8C-TY3-LSF-WHT-100
100m 8 Core TCCA Type 3 Alarm White LSF	
0966860	8C-TY3-LSZH-WHT-100
100m 8 Core Type 3 Alarm White LSZH	
0966870	8C-TY3-PE-BLK-100
100m 8 Core TCCA Type 3 Alarm Black PE	
0966880	8C-TY3-PVC-WHT-100
100m 8 Core TCCA Type 3 Alarm Cable White PVC	
0966890	8C-TY3-SCR-LSF-WHT-100
100m 8 Core TCCA Type 3 Alarm Screened White LSF	

To learn more about Vista products please visit www.norbain.com/brands/vista



TEL
+44 (0) 118 912 5000

