

GS200M

Micro shearlock, monitored


This monitored micro shearlock is recommended for use on doors where a concealed lock is required. Ideal for double-action swing doors (i.e. swings in both directions) or for sliding doors. Suitable for horizontal or vertical installation.

Features

- Mortice fitting
- Horizontal or vertical installation.
- Lock monitoring (magnetic bond sensor)
- Surface housing available (part GS200H)
- Glass mount saddle available (part GS200GH)

Technical Information

- Voltage 12Vdc or 24Vdc (+/-10%)
- Current Draw: 420mA @ 12 Vdc; 210mA @ 24 Vdc
- Lock monitoring contact (SPDT), rated: 1A @ 24 Vdc
- Dimensions:
Lock = 180mm (L) x 30mm (W) x 27mm (D)
Armature plate = 180mm (L) x 30mm (W) x 43mm (D)
- Holding Force: Up to 545kg (1200 lbs) in shear.
- Weight : 1.2 kg approx.

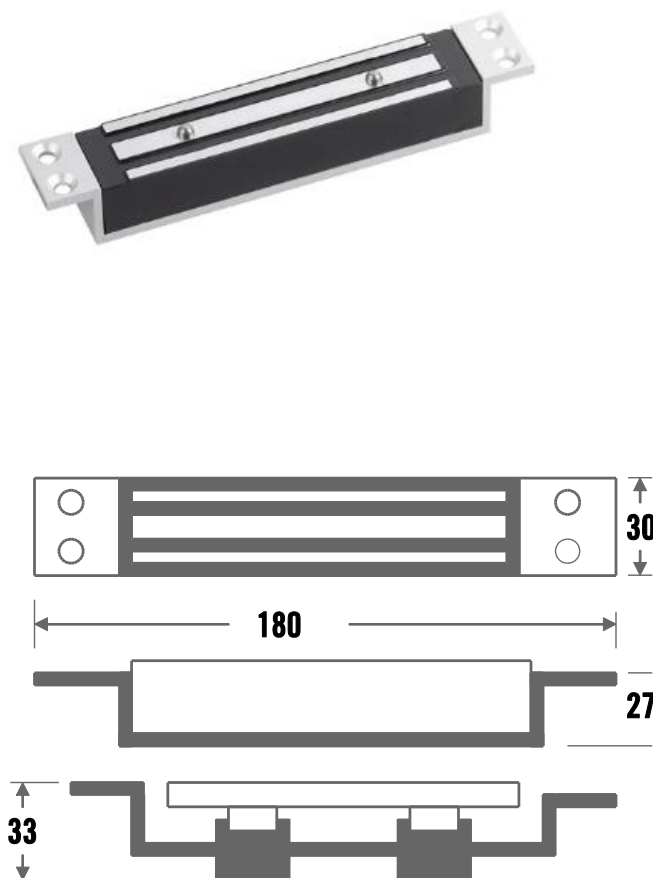

Related Products

GS200



GS200H



GS200GH



PSU3A-12(B)

