

iDS-9632NXI-M8/AI(B)
NVR DeepinMind



- Up to 2-ch@32 MP/2-ch@24 MP/4-ch@12 MP/8-ch@8 MP/16-ch@4 MP/32-ch@1080p decoding capacity
- H.265+/H.265/H.264+/H.264 video formats
- Up to 32-ch IP cameras can be connected
- Deep learning based video analytics for not wearing hard hat detection and event detection, including people running detection, people gathering detection, violent motion detection, using mobile phone detection, etc.

▪ Specification

Intelligent Analytics

AI by NVR	Pre-installed AI Algorithm Package Human (3 Algorithm models) 1. Facial recognition: 2. People counting: regional people counting, people counting statistics 3. PPE: safety helmets and reflective vests detection Vehicle (2 Algorithm models) 1. Vehicle attributes: vehicle brand, vehicle color, vehicle type 2. Non-motorized vehicle detection: motorcycle, bicycles Dangerous Event(2 Algorithm models) 1. Fire and smoke detection 2. Occupation of fire escape Behaviour (4 Algorithm models) 1. Street level behaviour : falling down detection, people gathering detection, fast moving detection, physical conflict detection 2. Indoor: playing mobile phone, number of people exception, overstaying detection 3. Perimeter: intrusion detection, line crossing detection, region entrance detection, region exiting detection 4. Smoke detection, call detection AIOP (Up to 16 models) Model type: detection model, classification model, mixed model (detection model and classification model)


AI Open Platform Performance

Live Video Analysis	2 engines in total, up to 4-ch for each engine (4-ch@4 MP, 2-ch@6 MP, 1-ch @8 MP)
Auto-Switch Video Analysis	2 engines in total, up to 8-ch for each engine (switching time should between 10 to 3600 sec)
Scheduled Capture Analysis	2 engines in total, up to 8-ch for each engine, (switch time should between 3 to 3600 seconds)


Video and Audio

IP Video Input	32-ch
Incoming Bandwidth	320 Mbps
Outgoing Bandwidth	400 Mbps
HDMI 1 Output	HDMI1 : 8K (7680 × 4320)/30 Hz, 4K (3840 × 2160)/60 Hz, 4K (3840 × 2160)/30 Hz, 2K (2560 × 1440)/60 Hz, 1080P (1920 × 1080)/60 Hz *: When HDMI 1 output resolution is 8K, the maximum HDMI 2 output resolution is 1080p.
HDMI 2 Output	HDMI2 : 4K (3840 × 2160)/60Hz, 4K (3840 × 2160)/30Hz, 2K (2560 × 1440)/60Hz, 1920 × 1080/60Hz
VGA 1 Output	1080P (1920 × 1080)/60 Hz
VGA 2 Output	1080P (1920 × 1080)/60 Hz
Video Output Mode	HDMI1/VGA1 simultaneous output, HDMI2/VGA2 simultaneous output
Audio Output	1-ch, RCA (Linear, 1 kΩ)
Two-Way Audio	1-ch, RCA (2.0 Vp-p, 1 k Ω)
Decoding	
Decoding Format	H.265/H.265+/H.264/H.264+

Decoding Capability	Up to 2-ch@32 MP/2-ch@24 MP/4-ch@12 MP/8-ch@8 MP/16-ch@4 MP/32-ch@1080P
Synchronous Playback	16-ch
Recording Resolution	32 MP/24 MP/12 MP/8 MP/6 MP/5 MP/4 MP/3 MP/1080p/UXGA/720p/VGA /4CIF/DCIF/ 2CIF/CIF/QCIF *: After ultra HD resolution mode is enabled, the NVR supports up to 8-ch 32 MP/24 MP IP video inputs.
Network	
Remote Connection	128
Network Protocol	TCP/IP, DHCP, IPv4, IPv6, DNS, DDNS, NTP, RTSP, SADP, SMTP, SNMP, NFS, iSCSI, ISUP, UPnP™, HTTP, HTTPS
API	ONVIF (profileS/G); SDK; ISAPI
Compatible Browser	IE11, Chrome V57, Firefox V52, Safari V12, Edge V89, or above version
Network Interface	2, RJ-45 10/100/1000 Mbps self-adaptive Ethernet interface
RAID	
RAID Type	RAID0, RAID1, RAID5, RAID6, RAID10
Auxiliary Interface	
Ctrl 12V	Controllable 12 VDC, 1 A power output for external alarm device; The power will be turned on when the alarm output is triggered. *: The Ctrl 12V power is controlled by alarm output 9.
DC 12V	12 VDC, 1 A power output
SATA	8 SATA interfaces; 3.5-inch HDD
eSATA	1 eSATA interface
Capacity	Up to 16 TB capacity for each HDD
Serial Interface	1 RS-232, 1 RS-485 (full-duplex)
USB Interface	Front panel: 2 × USB 2.0; Rear panel: 2 × USB 3.0
Alarm In/Out	16/9
General	
GUI Language	English, Russian, Bulgarian, Hungarian, Greek, German, Italian, Czech, Slovak, French, Polish, Dutch, Portuguese, Spanish, Romanian, Turkish, Japanese, Danish, Swedish Language, Norwegian, Finnish, Korean, Traditional Chinese, Thai, Estonian, Vietnamese, Croatian, Slovenian, Serbian, Latvian, Lithuanian, Uzbek, Kazakh, Arabic, Ukrainian, Kyrgyz, Brazilian Portuguese, Indonesian
Power Supply	100 to 240 VAC, 50 to 60 Hz
Consumption	≤ 50 W (without HDD)
Working Temperature	-10 to 55° C (14 to 131° F)
Working Humidity	10 to 90%
Dimension (W × D × H)	442 × 460 × 88 mm (17.4 × 18.1 × 3.5 inch)
Weight	≤ 9 kg (without HDD)

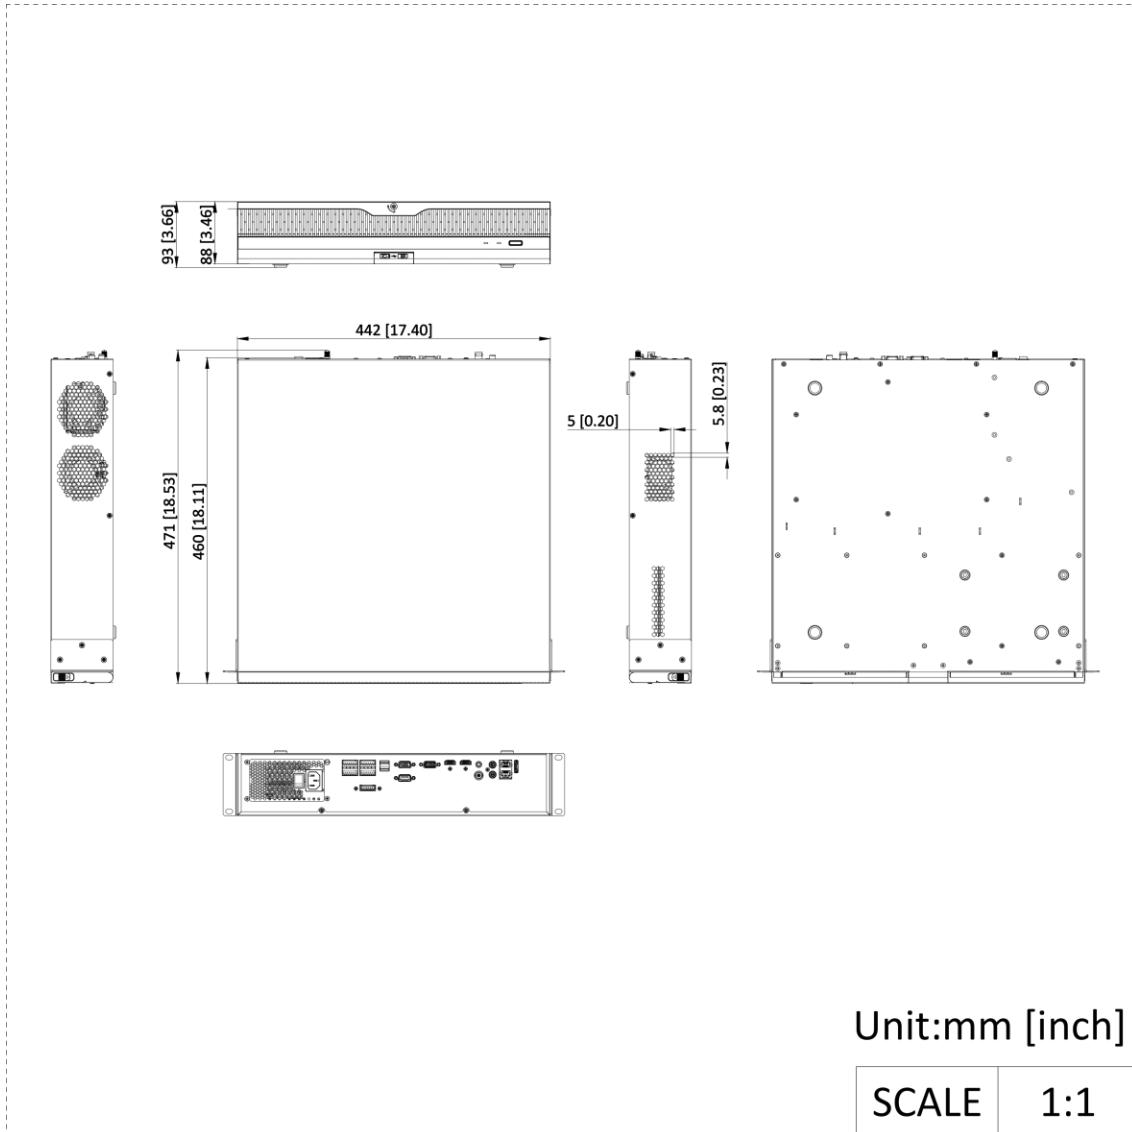- Dimension

Physical Interface

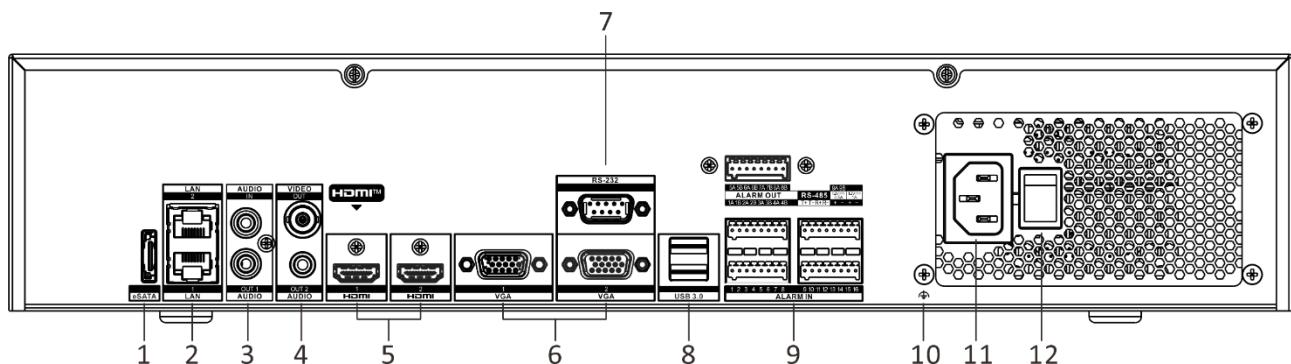

No.	Description	No.	Description
1	eSATA interface	7	RS-232 serial interface
2	LAN interfaces	8	USB 3.0 interfaces
3	Audio in and out	9	Alarmin, alarmout, RS-485 serial interface, Ctrl 12V and DC 12V
4	Audio out and video out	10	GND
5	HDMI 1 and HDMI 2 interfaces	11	100 to 240 VAC power supply
6	VGA 1 and VGA 2 interfaces	12	Power switch

Available Model

iDS-9632NXI-M8/AI(B)

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision_Global



Hikvision Corporate Channel



hikvisionhq