



ARCHITECTURAL BRACKETS FOR SLIMLINE MAGNETS (1200LB)


MAGNETIC LOCK

Fire tested range of maglocks and brackets from a market leader in access control.

FIRE TESTED to
BS EN1634-1:2014 & BS476:Part22:1987
(30, 60, 90 & 120 min timber door-sets)



AB1200CL

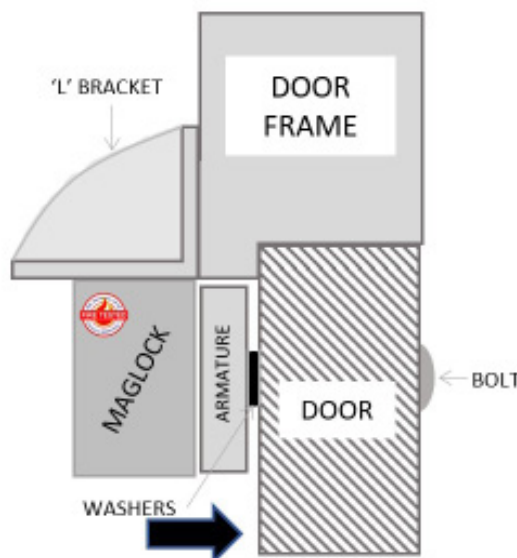

SPECIFICATION

- AB1200CL
- Architectural L bracket
 - Anodised aluminium finish
 - Adjustable to suit different applications
 - For use with the ML1200 range of products
 - Cover screws and bolts (no visible fixings)
 - Covers entire length of maglock
 - For outward opening doors
 - Aesthetically improves the appearance of the maglock

FEATURES

- AB1200CL
- Fire rated (30, 60, 90 & 120 min timber door set)
 - Provide a more aesthetically pleasing finish to any maglock installation.
 - Can suit a wide range of locations from modern offices to public buildings

Other Brackets/Housings - 1200 Range:

- BK1200ZL (ZL bracket)
- BK1200-F-L/AB (Architectural F/ZL)
- AB1200ZL-DC (Architectural ZL)

INWARD

- BK1200L (L Bracket)
- ADJ1200-L (Highly adjustable L)
- AH1200 (Required for Fire Doors)

OUTWARD

OTHER PRODUCTS

BK1200-FL/AB



AH1200



DIMENSIONS

- AB1200CL
- L: 270x74x47 (mm) (LxWxH)
 - 400g (Boxed)
 - 318g (Unboxed)

CONTENTS

- AB1200CL
- Architectural L bracket
 - Fixing kit

ML1200



DU-GB/PTE

