

Marine exit button

System specifications

| | | |
|---------------------------------|------------------------|----------------------------------|
| Cable Length | 5m/16ft | |
| Cable extension length and type | ≤ 25m/82ft | Belden 9538/ Belden 5506FE (USA) |
| | ≤ 100m/328ft | Belden 9540/ Belden 5306FE (USA) |
| Versions | Satin or bright chrome | |

Electrical

| | |
|---------------------|--------------|
| Operating Voltage | 10V - 14V DC |
| Current consumption | 220mA |


Environment

| | |
|-----------------------|---------------|
| Operating temperature | -25°C - +55°C |
| | -4°F - +131°F |
| Moisture resistance | No |
| Vandal Resistance | Medium |



Exit buttons may be used with Compact, Switch2 or Net2 systems. The Marine exit button is designed for looks as well as function. It uses a touch sensitive lens. The Marine exit button is suitable for interior use.

To operate, just touch the lens, the door opens and the exit button which is normally backlit green, flashes (only when used with Switch2 and Net2).

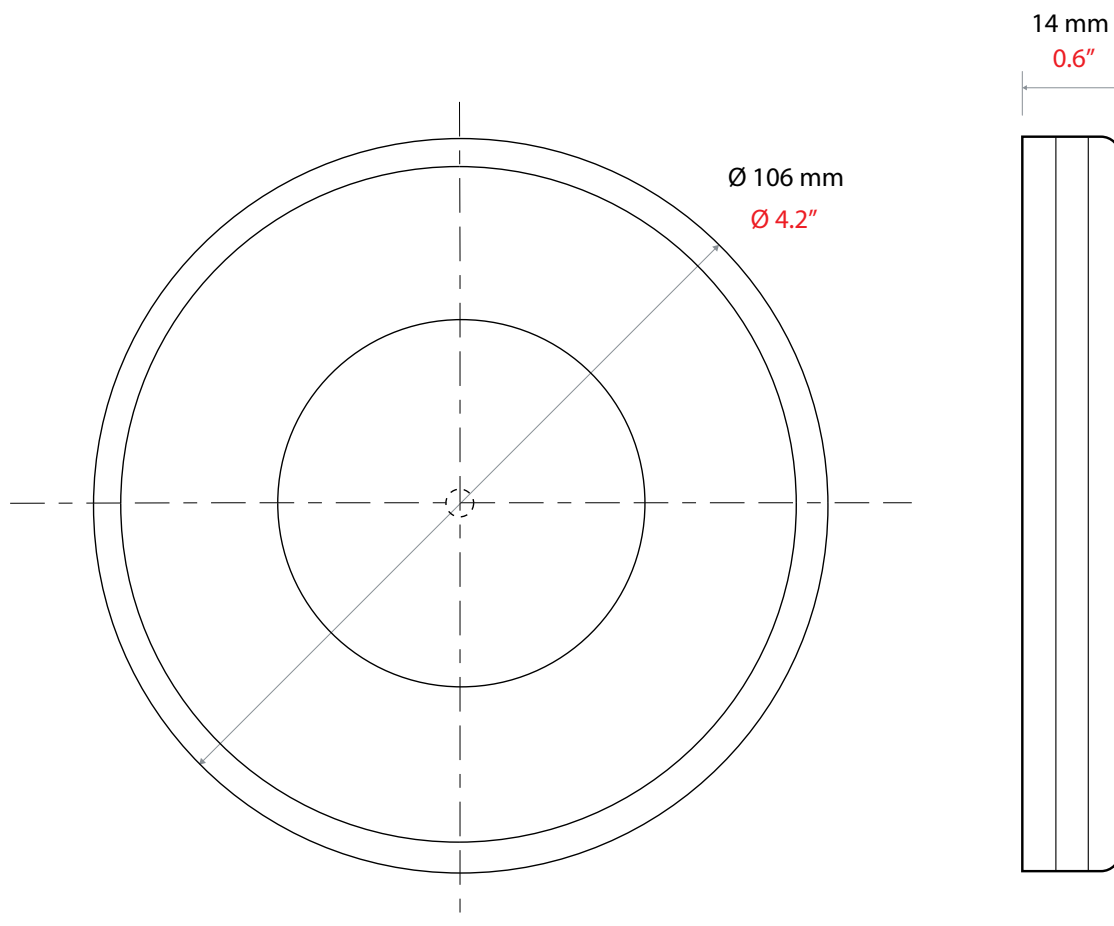

Accessories and sales codes

Marine exit button 593-721

Marine exit button - Chrome 593-731