


S312N -B Relay



Boxed General purpose transistor driven interface relay. This device accepts a variety of input conditions (Voltage, Logic, Closed Circuit and Open Circuit) for interfacing various signals via voltage free DPCO contacts.

- **Box tamper Switch**
- **Supplied in single gang enclosure**
- **12 vdc powered**
- **Transistor driven interface relay**
- **Screw terminals for easy connection**
- **Manufactured in the UK**

Specification	S312N-B
Led Current	N/A
Switch Contacts	DPCO contacts rated at 2A
Visual Indication	1 x Red
Integral Sounder Level	N/A
Supply Voltage	12vdc
Supply input current	40 mA max
Tamper	Yes
Material	PCB Module in ABS box
Dimensions	Relay Dimensions - L80mm x W74mm x D16mm Box Dimensions - L87mm x W87mm x D36mm
Weight	0.118kg
IP Rating	N/A
Approvals	CE and RoHs compliant

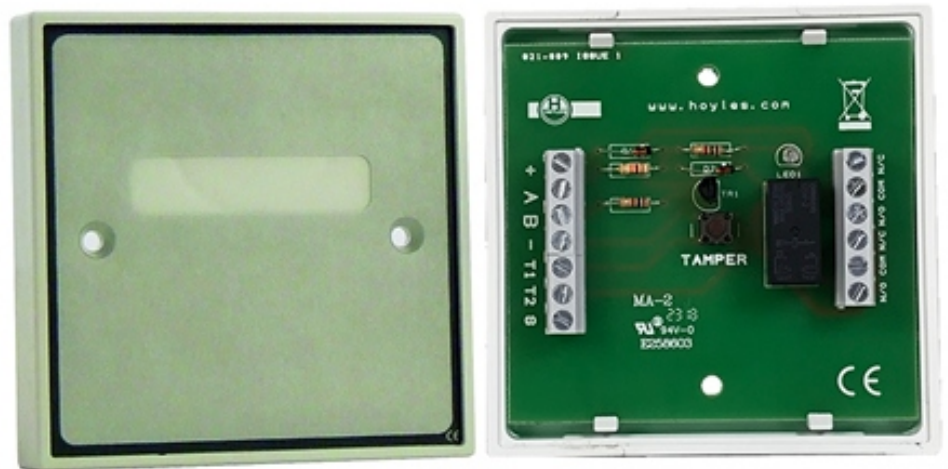

Related Products

Microprocessor controlled boxed timer relay	8 way fused output module	12vdc at 1A DPCO relay	Boxed 10amp mains rated relay	Relay in steel enclosure with 2A 12vdc PSU
S351-B	S348	S342-1	VQ16297	S312T-B-PSU



Hoyles Electronic Developments Ltd

T. 01744 886600

F. 01744 886607

E. sales@hoyles.com

W. www.hoyles.com

