


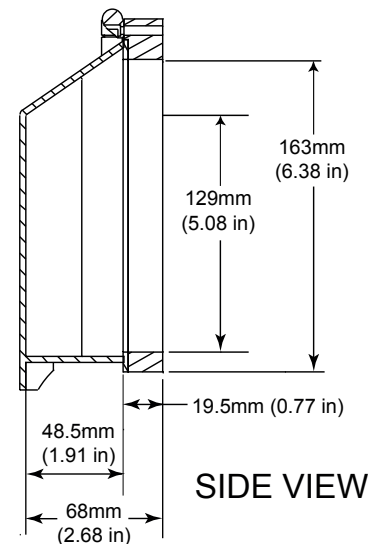


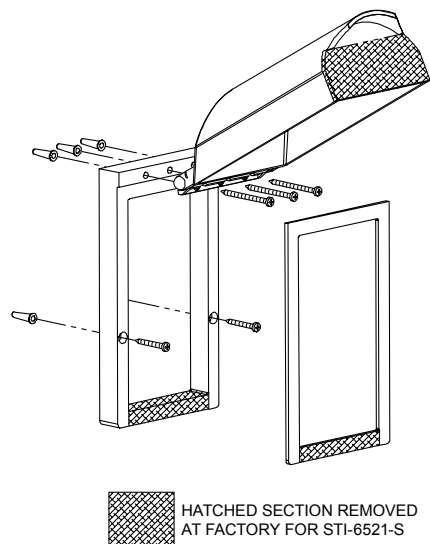



Safety Technology International

European Office
Taylor House • 34 Sherwood Road • Bromsgrove
Worcestershire • B60 3DR • England
Tel: 44 (0) 1527 520 999 Fax: 44 (0) 1527 501 999
E-mail: info@sti-emea.com • Web: www.sti-emea.com

USA - Headquarters
2306 Airport Road • Waterford, Michigan 48327-1209
Phone: 248-673-9898 • Fax: 248-673-1246
Toll Free: 800-888-4784 • E-mail: info@sti-usa.com
Web: www.sti-usa.com

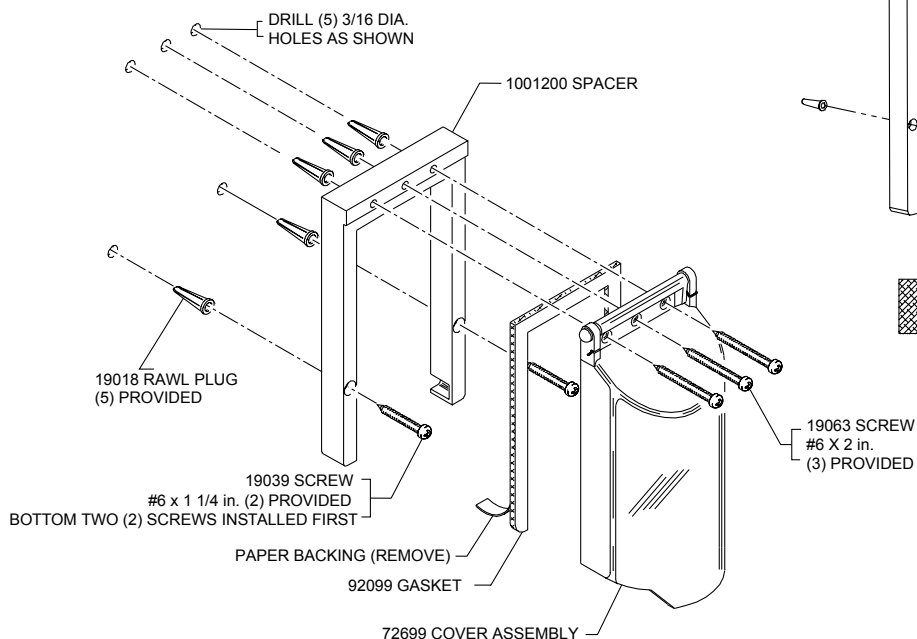

STI-6520
STI-6521

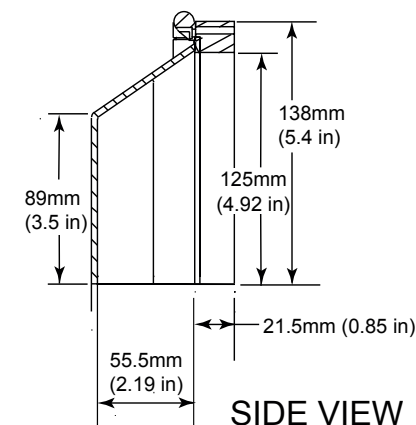

STI-6522

INSTALLATION INSTRUCTIONS

1. Using the spacer as a template, mark and drill (5) 3/16 dia. holes.
2. Install the (5) rawl plugs and fasten the (2) bottom screws of the spacer.
3. Remove backing paper from gasket and place gasket on spacer with bottom of gasket aligned with bottom of spacer.
4. Install the cover assembly with the (3) remaining hinge screws.

CLEANING INSTRUCTIONS

1. Rinse cover with water to remove abrasive dust and dirt.
2. Wash with soap or mild detergent using a soft cloth. (DO NOT SCRUB.)
3. Rinse once more, then dry with a soft cloth or chamois.
4. To remove grease or wet paint, rub gently with a cloth wetted thoroughly with naphtha, then wash and rinse. (DO NOT USE RAZOR BLADES.)

Electronic warranty form at www.sti-usa.com/wc14

INSTALLATION OF STI-6520, STI-6521 and STI-6522 BOPPER STOPPER®

All specifications and information shown were current as of publication and are subject to change without notice.

6520/21/22IS SEPT2017

