

### DESCRIPTION


The TOA ZM-104A Impedance Meter can measure the rough impedance value of speaker lines easily in the same manner as a circuit tester measures resistance.

### SPECIFICATIONS

Power Source	R6 × 4 (1.5 V DC × 4)
Current Consumption	39 mA
Reading	Direct reading meter, unit: Ω
Measurement Range	× 1 range: 5 Ω – 1 kΩ × 10 range: 50 Ω – 10 kΩ × 100 range: 500 Ω – 100 kΩ
Oscillation Frequency	1 kHz, ±10 %
Battery Life When Continuously Used	× 1 range: 30 h × 10 range and × 100 range: 60 h
Operating Temperature	-5 °C to +40 °C (23 °F to 104 °F)
Dimensions	120 (W) × 220 (H) × 63 (D) mm (4.72" × 8.66" × 2.48") (carrying case) 110 (W) × 180 (H) × 58 (D) mm (4.33" × 7.09" × 2.28") (unit only)
Finish	ABS resin, black
Weight	700 g (1.54 lb) (including carrying case, without batteries)
Accessory	Test leads ×1 set
Measurement Category	CAT I

Note: Batteries are optional.

### APPEARANCE

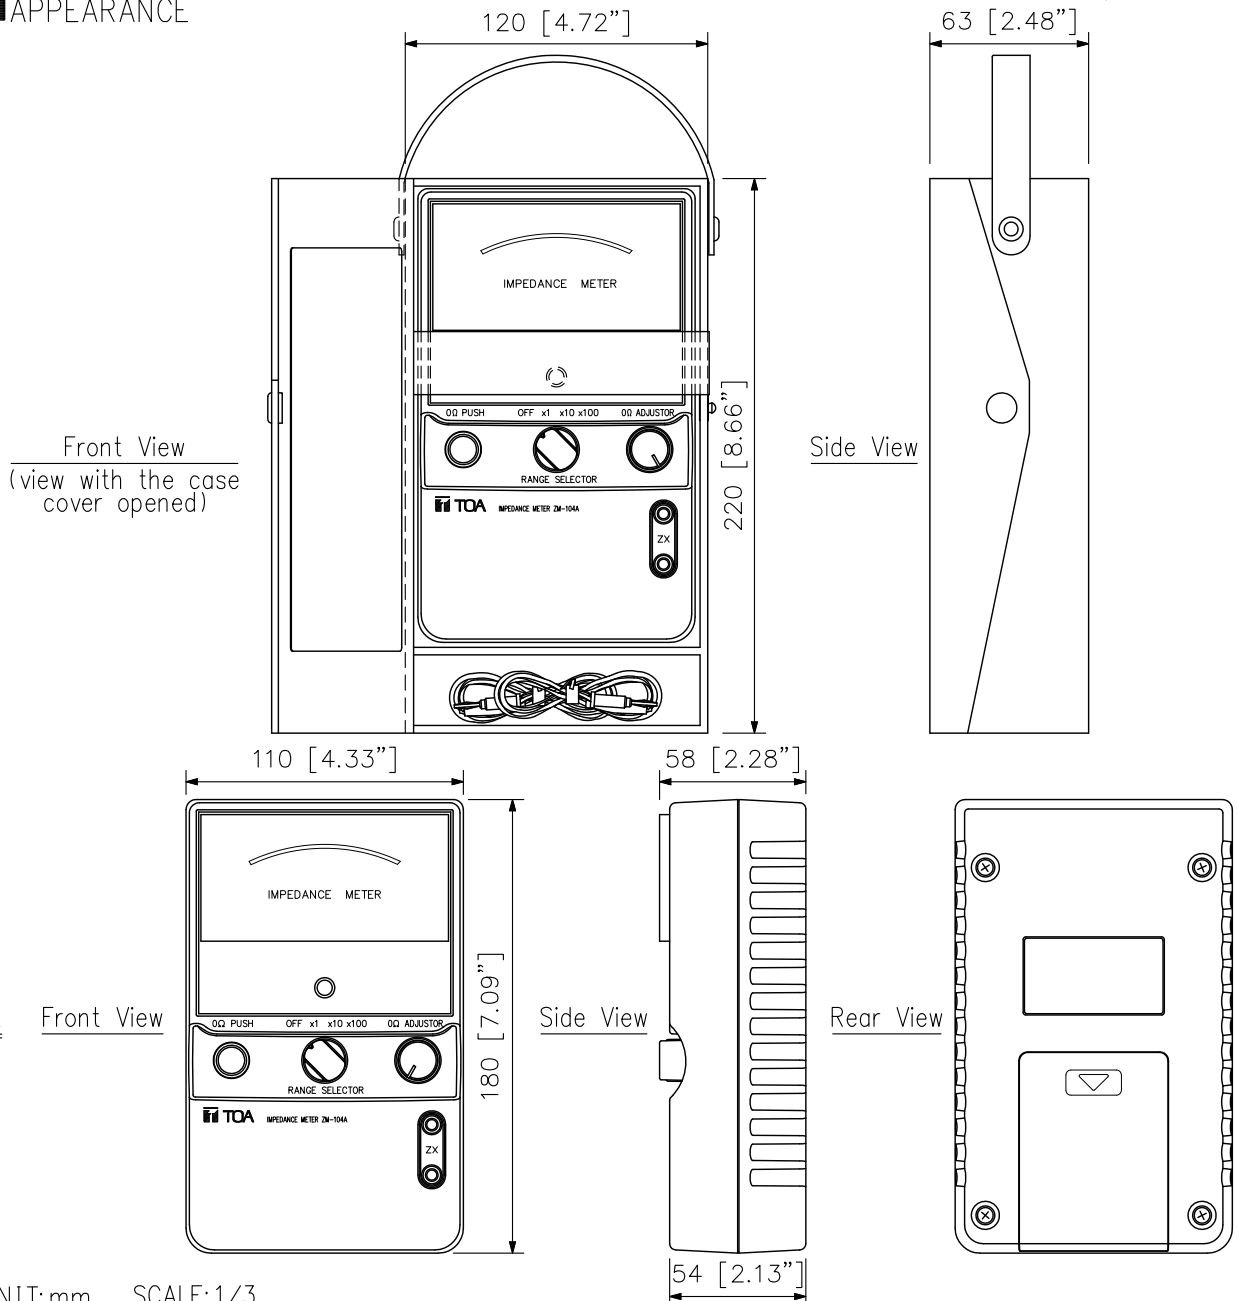

UNIT: mm SCALE: 1/3