



ACC2BPLA



ACT2BP

Altron's range of Modular Towers and Columns are a practical and economic solution to many commercial and industrial CCTV installations. Sectional construction means economic shipping and easy installation in more inaccessible locations.

We offer the most comprehensive range available with tilt-down models up to 15 metres and fixed models up to 25 metres with telescopic, cabinet based and internally cabled products completing the range.

Altron's numerous security design features ensure a good level of resistance against vandal attacks.



ACT2BP

Fixed height range 4.5m - 12m
Tilt-down height range 4.5m - 14m

Altron Camera Towers, a cost effective and comprehensive range with most models available 'ex stock'. Giving good rigidity they are suitable for exposed, high wind load locations. The range is for medium to heavy camera installations, and for dual lighting & CCTV applications, or lighter applications where rigidity is paramount. **ACT Towers** are not ideally suited to public area installations due to their climbable nature and external camera cabling.

Typically used for the following types of installation

- o Industrial and commercial premises
- o Perimeter detection
- o Utilities sites
- o Car parks
- o Petrochemical sites
- o Securing compounds
- o Military and high security sites

General Features

- o Modular construction for ease of assembly and installation on site
- o Ideal for restricted access areas
- o Provides stable mounting platform for all camera types
- o Demountable winches ensure tilt down models are secure and reduces costs on multiple installations
- o Tilt Down models enable camera maintenance at ground level, therefore reducing maintenance costs
- o Tilt Down models available in both bolt down and post mounted versions
- o A wide range of standard Altron Accessories and Brackets available ex stock
- o Simple system of casting ground frame, bolts or post
- o Conduit cabling system available as an option
- o Quick turnaround for larger projects
- o Available with AWI697 Cabinet if required (See page 13)
- o Constructed in high tensile steel and hot dip galvanised after fabrication for durability
- o Option of painting over the galvanised finish in colours available from BS and RAL colour charts
- o For design, manufacturing and finishing standards, see details on page 107



ACT1 BP in tilted position


ACT Modular Towers ← Technical Specifications

ACT

FB
Fixed Base

BP
Base Post

PM
Post Mounted

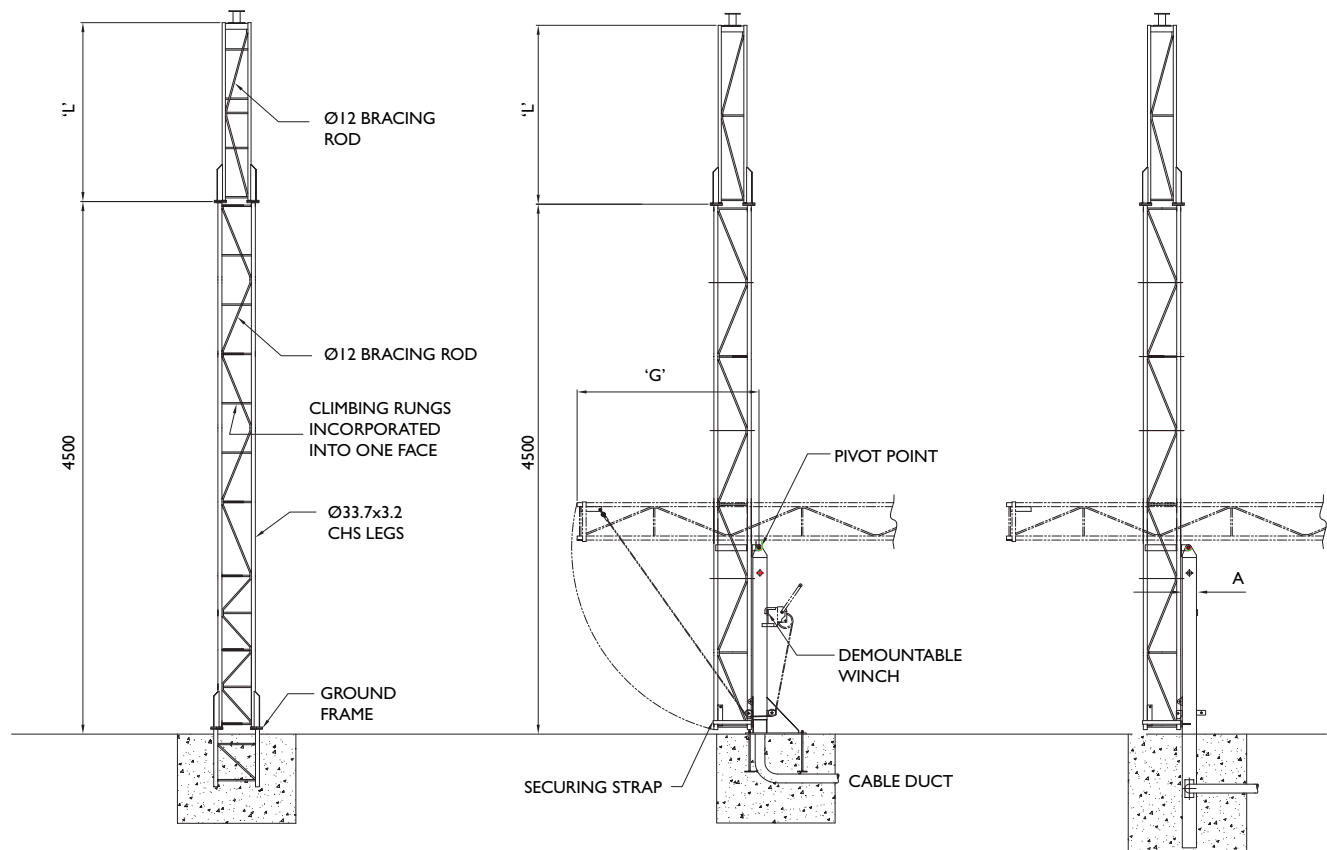

All camera mounting plates are
Ø 127 with 8 No Ø 8.5
equi-spaced on 101.6 PCD.
Ø 40 thro' column spacer

FOR FOUNDATION & BOLTING
DETAILS REFER TO PAGE 21

Model No.	Height in mtrs	Post type	Max equip weight at top kgs	Max surface area m ²	Post size A ²	Mid length mtrs L	Top length mtrs	Tower rear clearance when tilting G	Winch part number	Product weight kgs
ACT1 Standard Duty	4.5	FB	40	0.4	-	-	-	-	-	55
		PM	40	0.4	120	-	-	1700	DW1000/AT	98
		BP	40	0.4	120	-	-	1700	DW1000/AT	115
ACT2 Standard Duty	6	FB	40	0.4	-	-	1.5	-	-	70
		PM	40	0.4	120	-	1.5	1700	DW1000/AT	118
		BP	40	0.4	120	-	1.5	1700	DW1000/AT	135
ACT3 Standard Duty	7.5	FB	35	0.25	-	-	3	-	-	81
		PM	35	0.25	120	-	3	1700	DW1500/AT	131
		BP	35	0.25	120	-	3	1700	DW1500/AT	147
ACT3HD Heavy Duty	7.5	FB	40	0.35	-	-	3	-	-	107
		PM	40	0.35	150	-	3	2000	DW1500/ATHD	193
		BP	40	0.35	150	-	3	2000	DW1500/ATHD	197
ACT4HD Heavy Duty	9	FB	35	0.25	-	-	4.5	-	-	124
		PM	35	0.25	150	-	4.5	2000	DW1500/ATHD	204
		BP	35	0.25	150	-	4.5	2000	DW1500/ATHD	208
ACT12	12	FB	25	0.2	-	4.5	3	-	-	150
		BP	25	0.2	180	4.5	3	2400	DW2500/AT	237
		PM	25	0.2	180	4.5	3	2400	DW2500/AT	233
ACT14 Telescopic	14	BP	50	0.25	200	-	7	2800	DW1500/AT14	387
		PM	50	0.25	200	-	-	2800	DW1500/AT14	341

Where payloads are greater than those stated above, please contact Altron
All dimensions in mm unless stated otherwise

Accessories

Top mounting brackets for Fixed and PTZ cameras	P76
Swanneck brackets for Dome cameras	P81
Anti-climb guards	P77
Clamp-on camera mounting brackets	P78
Telemetry box mounting brackets	P77
Tower top mounting cages	P83

Quick reference


Single fixed camera knuckle	PTS-1
Twin fixed camera bracket	TB2-600F
Half swanneck for dome	AW1699H
Full swanneck for dome	AW1699F
Anti climb guard	SGT
Telemetry bracket	ATBT

→ Modular Towers & Columns Foundation & Bolting Details

MODEL NO.	HEIGHT MTRS	BOLT CENTRES I ²	BASE PLATE SIZE H ²	SERVICE ENTRY SIZE	SERVICE C ENTRY OFFSET (BP MODELS)	HOLDING DOWN BOLT SIZE D x L	FOUNDATION SIZES FOR THE UK					
							COUNTRY LOCATION			TOWN LOCATION		
							AREA A	AREA B	AREA C	AREA A	AREA B	AREA C
ACC-FB - Fixed Base columns												
ACC1/FB	4.5	350	405	90x90		M16x245	1.0 x 1.0 x 0.5	1.1 x 1.1 x 0.55	1.1 x 1.1 x 0.55	0.9 x 0.9 x 0.5	1.0 x 1.0 x 0.5	1.0 x 1.0 x 0.5
ACC2/FB	6	450	510	110x110		M20x325	1.1 x 1.1 x 0.55	1.2 x 1.2 x 0.6	1.2 x 1.2 x 0.6	1.0 x 1.0 x 0.5	1.1 x 1.1 x 0.55	1.1 x 1.1 x 0.55
ACC2/FB/HD	6	450	510	140x140		M20x325	1.2 x 1.2 x 0.6	1.3 x 1.3 x 0.65	1.3 x 1.3 x 0.65	1.1 x 1.1 x 0.55	1.2 x 1.2 x 0.6	1.2 x 1.2 x 0.6
ACC3/FB	7.5	450	510	140x140		M20x325	1.3 x 1.3 x 0.65	1.4 x 1.4 x 0.7	1.4 x 1.4 x 0.7	1.2 x 1.2 x 0.6	1.3 x 1.3 x 0.65	1.3 x 1.3 x 0.65
ACC3/FB/HD	7.5	550	630	180x180		M24x425	1.4 x 1.4 x 0.7	1.5 x 1.5 x 0.75	1.5 x 1.5 x 0.75	1.3 x 1.3 x 0.65	1.4 x 1.4 x 0.7	1.4 x 1.4 x 0.7
ACC4/FB	9	550	630	140x140		M24x425	1.4 x 1.4 x 0.7	1.5 x 1.5 x 0.75	1.6 x 1.6 x 0.8	1.3 x 1.3 x 0.65	1.4 x 1.4 x 0.7	1.4 x 1.4 x 0.7
ACC4/FB/HD	10	550	630	180x180		M24x425	1.8 x 1.8 x 0.9	1.8 x 1.8 x 0.9	2.0 x 2.0 x 1.0	1.7 x 1.7 x 0.9	1.8 x 1.8 x 0.9	1.8 x 1.8 x 0.9
ACC-BP(PM) - Base Post (Post Mounted) columns												
ACC1/BP	4.5	450	510	110x110	90	M20x325	1.0 x 1.0 x 0.5	1.1 x 1.1 x 0.55	1.1 x 1.1 x 0.55	0.9 x 0.9 x 0.5	1.0 x 1.0 x 0.5	1.0 x 1.0 x 0.5
ACC2/BP	6	450	510	110x110	90	M20x325	1.1 x 1.1 x 0.55	1.2 x 1.2 x 0.6	1.2 x 1.2 x 0.6	1.0 x 1.0 x 0.5	1.1 x 1.1 x 0.55	1.1 x 1.1 x 0.55
ACC2/BP/HD	6	450	510	110x110	90	M20x325	1.2 x 1.2 x 0.6	1.2 x 1.2 x 0.6	1.3 x 1.3 x 0.65	1.1 x 1.1 x 0.55	1.2 x 1.2 x 0.6	1.2 x 1.2 x 0.6
ACC3BP	7.5	550	630	140x140	105	M24x425	1.3 x 1.3 x 0.65	1.3 x 1.3 x 0.65	1.4 x 1.4 x 0.7	1.2 x 1.2 x 0.6	1.3 x 1.3 x 0.65	1.3 x 1.3 x 0.65
ACC3BP/HD	7.5	550	630	140x140	105	M24x425	1.3 x 1.3 x 0.65	1.4 x 1.4 x 0.7	1.5 x 1.5 x 0.75	1.3 x 1.3 x 0.65	1.3 x 1.3 x 0.65	1.4 x 1.4 x 0.7
ACC4/BP	9	550	630	140x140	105	M24x425	1.4 x 1.4 x 0.7	1.5 x 1.5 x 0.75	1.6 x 1.6 x 0.8	1.3 x 1.3 x 0.65	1.4 x 1.4 x 0.7	1.4 x 1.4 x 0.7
ACC4/BP/HD	10	700	800	180x180	150	M27x600	1.8 x 1.8 x 0.9	1.8 x 1.8 x 0.9	2.0 x 2.0 x 1.0	1.7 x 1.7 x 0.9	1.8 x 1.8 x 0.9	1.8 x 1.8 x 0.9
ACC12/BP	12	700	800	180x180	150	M27x600	1.8 x 1.8 x 0.9	1.9 x 1.9 x 1.0	2.0 x 2.0 x 1.0	1.7 x 1.7 x 0.9	1.8 x 1.8 x 0.9	1.9 x 1.9 x 0.9
ACC15/BP	15	700	800	180x180	150	M27x600	2.0 x 2.0 x 1.0	2.0 x 2.0 x 1.0	2.2 x 2.2 x 1.1	1.8 x 1.8 x 0.9	2.0 x 2.0 x 1.0	2.0 x 2.0 x 1.0
ACT-BP-PM-FB- standard towers (HD bolts not used on FB towers)												
ACT1	4.5	450	510	110x110	90	M20x325	1.1 x 1.1 x 0.55	1.1 x 1.1 x 0.55	1.2 x 1.2 x 0.6	1.0 x 1.0 x 0.5	1.0 x 1.0 x 0.5	1.1 x 1.1 x 0.55
ACT2	6	450	510	110x110	90	M20x325	1.2 x 1.2 x 0.6	1.2 x 1.2 x 0.6	1.3 x 1.3 x 0.65	1.1 x 1.1 x 0.55	1.1 x 1.1 x 0.55	1.2 x 1.2 x 0.6
ACT3	7.5	450	510	110x110	90	M20x325	1.2 x 1.2 x 0.6	1.2 x 1.2 x 0.6	1.3 x 1.3 x 0.65	1.1 x 1.1 x 0.55	1.1 x 1.1 x 0.55	1.2 x 1.2 x 0.6
ACT3/HD	7.5	550	630	140x140	105	M24x425	1.3 x 1.3 x 0.65	1.4 x 1.4 x 0.7	1.4 x 1.4 x 0.7	1.2 x 1.2 x 0.6	1.2 x 1.2 x 0.6	1.3 x 1.3 x 0.65
ACT4/HD	9	550	630	140x140	105	M24x425	1.3 x 1.3 x 0.65	1.4 x 1.4 x 0.7	1.4 x 1.4 x 0.7	1.2 x 1.2 x 0.6	1.3 x 1.3 x 0.65	1.3 x 1.3 x 0.65
ACT12	12	550	630	160x160	105	M24x425	1.4 x 1.4 x 0.7	1.5 x 1.5 x 0.75	1.6 x 1.6 x 0.8	1.3 x 1.3 x 0.65	1.4 x 1.4 x 0.7	1.4 x 1.4 x 0.7
ACT14/BP/PM	14	700	800	230x230	150	M27x600	1.6 x 1.6 x 0.8	1.7 x 1.7 x 0.9	1.8 x 1.8 x 0.9	1.4 x 1.4 x 0.75	1.5 x 1.5 x 0.75	1.6 x 1.6 x 0.8
ANCT - Nested towers												
ANCT/4	4	420	570	370x250		M24x425	1.1 x 1.1 x 0.55	1.1 x 1.1 x 0.55	1.2 x 1.2 x 0.6	1.0 x 1.0 x 0.5	1.0 x 1.0 x 0.5	1.1 x 1.1 x 0.55
ANCT/6	6	420	570	370x250		M24x425	1.2 x 1.2 x 0.6	1.2 x 1.2 x 0.6	1.3 x 1.3 x 0.65	1.1 x 1.1 x 0.55	1.2 x 1.2 x 0.6	1.2 x 1.2 x 0.6
ANCT/8	8	420	570	370x250		M24x425	1.3 x 1.3 x 0.65	1.3 x 1.3 x 0.65	1.4 x 1.4 x 0.7	1.2 x 1.2 x 0.6	1.2 x 1.2 x 0.6	1.3 x 1.3 x 0.65
ANCT/10	10	420	570	370x250		M24x425	1.4 x 1.4 x 0.7	1.4 x 1.4 x 0.7	1.5 x 1.5 x 0.75	1.2 x 1.2 x 0.6	1.3 x 1.3 x 0.65	1.4 x 1.4 x 0.7
AW1697 - cabinet based tilt-down columns												
AW1697/4.5	4.5m	450	510	430x280		M20x325	1.0 x 1.0 x 0.5	1.1 x 1.1 x 0.55	1.1 x 1.1 x 0.55	0.9 x 0.9 x 0.5	1.0 x 1.0 x 0.5	1.0 x 1.0 x 0.5
AW1697/6	6m	450	510	430x280		M20x325	1.1 x 1.1 x 0.55	1.2 x 1.2 x 0.6	1.2 x 1.2 x 0.6	1.0 x 1.0 x 0.5	1.1 x 1.1 x 0.55	1.1 x 1.1 x 0.55
AW1697/6HD	6m	450	510	430x280		M20x325	1.2 x 1.2 x 0.6	1.2 x 1.2 x 0.6	1.3 x 1.3 x 0.65	1.1 x 1.1 x 0.55	1.2 x 1.2 x 0.6	1.2 x 1.2 x 0.6
AW1697/7.5	7.5m	550	630	430x280		M24x425	1.3 x 1.3 x 0.65	1.3 x 1.3 x 0.65	1.4 x 1.4 x 0.7	1.2 x 1.2 x 0.6	1.3 x 1.3 x 0.65	1.3 x 1.3 x 0.65
AW1697/7.5HD	7.5m	550	630	430x280		M24x425	1.3 x 1.3 x 0.65	1.4 x 1.4 x 0.7	1.5 x 1.5 x 0.75	1.3 x 1.3 x 0.65	1.3 x 1.3 x 0.65	1.4 x 1.4 x 0.7
AW1697/9	9m	550	630	430x280		M24x425	1.4 x 1.4 x 0.7	1.5 x 1.5 x 0.75	1.6 x 1.6 x 0.8	1.3 x 1.3 x 0.65	1.4 x 1.4 x 0.7	1.4 x 1.4 x 0.7
AW1697/9HD	10m	700	800	430x280		M27x600	1.8 x 1.8 x 0.9	1.8 x 1.8 x 0.9	2.0 x 2.0 x 1.0	1.7 x 1.7 x 0.9	1.8 x 1.8 x 0.9	1.8 x 1.8 x 0.9
AW1697/12	12m	700	800	430x280		M27x600	1.8 x 1.8 x 0.9	1.9 x 1.9 x 1.0	2.0 x 2.0 x 1.0	1.7 x 1.7 x 0.9	1.8 x 1.8 x 0.9	1.9 x 1.9 x 0.9
AW1697/15	15m	700	800	430x280		M27x600	2.0 x 2.0 x 1.0	2.0 x 2.0 x 1.0	2.2 x 2.2 x 1.1	1.8 x 1.8 x 0.9	2.0 x 2.0 x 1.0	2.0 x 2.0 x 1.0
ACC - Telescopic columns												
ACC/TEL/4	4m	350	405	90x90		M16x245	0.9 x 0.9 x 0.5	0.9 x 0.9 x 0.5	1.0 x 1.0 x 0.5	0.9 x 0.9 x 0.5	0.9 x 0.9 x 0.5	0.9 x 0.9 x 0.5
ACC/TEL/6	6m	450	510	110x110		M20x325	1.1 x 1.1 x 0.55	1.2 x 1.2 x 0.6	1.2 x 1.2 x 0.6	1.1 x 1.1 x 0.55	1.1 x 1.1 x 0.55	1.2 x 1.2 x 0.6
ACC/TEL/8	8m	450	510	110x110		M20x325	1.2 x 1.2 x 0.6	1.3 x 1.3 x 0.65	1.3 x 1.3 x 0.65	1.1 x 1.1 x 0.55	1.2 x 1.2 x 0.6	1.3 x 1.3 x 0.65

Table dimensions in mm

Foundation sizes in table are W x W x D
Dimensions in metres



*D= 1000 on PM and buried
flange/embedded base models

- For area D locations and exposed locations over 100m above sea level for areas A, B and 150m above sea level for area C, we recommend increased foundation sizes. Please refer to the table on page 101 for conformation of these.
- A minimum soil bearing capacity of 75 kN/m² is assumed.
- Foundation base dimensions are typical and may vary depending on site conditions.
- Please refer to the foundations & windloading section on pages 101-103 for further guidance.

**REFER TO
INSTALLATION
METHODS ON
PAGES 104-106**

GALVANISED HOLDING DOWN BOLTS

