

## MIFARE Panel Mount Reader

TDSi is pleased to offer this high quality panel mount reader, available in several reader formats including CSN, Sector, DESfire and custom configurations. It can be installed in standard 40 x 40mm panel cut outs.

### Features & Benefits


- Compatible with ISO 14443-A standard for 13.56 MHz Smart Cards.
- Integral LED, providing clear visual indication of access status.
- In-built sounder, giving unambiguous feedback of card reads.
- Selectable output formats, allowing connection to most access control systems.

### Specification

Part No.	5002-0618 / 5002-0638
Dimensions	107 x 71 x 27mm
Weight	60g
Operating Environment	-20°C to +55°C, 0 to 95% RH (non-condensing)
Power Supply	7 to 14Vdc, 200mA (Max)
Card Technology	ISO 14443-A; MIFARE Classic, PLUS and DESfire,
Sounder	Integral
LED	Integral
Read Range	<50mm
Output Formats	Clock and Data, Wiegand 26-bit**/34-bit/37-bit

\* Figures may vary between cards and installations.

\*\*Factory default, contact TDSi for alternative configurations.

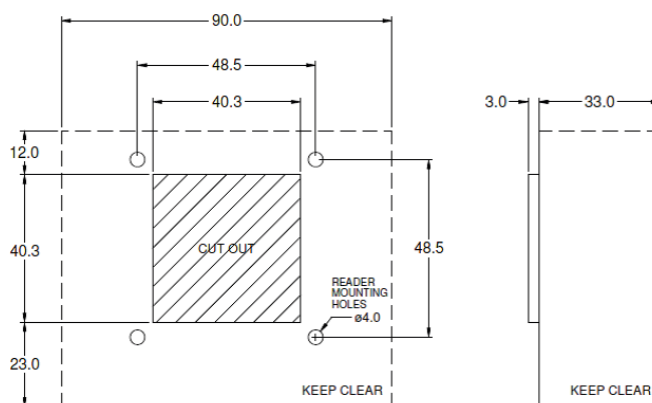

### Ordering Information

#### Part No. 5002-0618

Description: MIFARE CSN Panel Mount Reader.

#### Part No. 5002-0638

Description: MIFARE Sector & DESfire Panel Mount Reader.