


Perfect Doorphone choice for daily life

The security that comes with being able to control who comes into your building along with the ability to verbally and visually confirm their identity is immeasurable. Akuvox's Video Doorphone R28A enables you to easily monitor an entrance door or gate and gives you the peace of mind knowing that your facility is more secure.

At a Glance

- Vandal resistant body, with flush buttons;
- Wide-angle camera: 116° (H), 60° (V);
- PoE (IEEE802.3af, Power-over-Ethernet);
- Two-way audio communication over IP networks with Echo Cancel feature;
- Complies with SIP standard for easy integration in every SIP capable PBXes;
- Complies with ONVIF standard for easy integration with any network surveillance system;

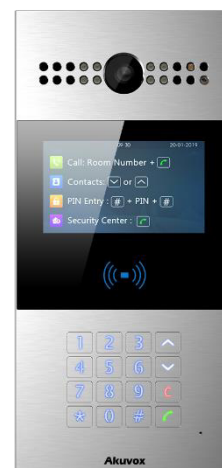

Physical & Power

- Front panel: Aluminum
- Display: 4.3 Inch, color TFT LCD
- Camera: 2M pixels, automatic lighting
- Numeric keypad with extra buttons
- Light sensor: Support
- Infrared sensor: Support
- Wiegand port: Support
- RS485 port: Support
- RF card reader: 13.56MHz & 125kHz
- Relays out: 3
- Inputs: 3
- Microphone: -40dB
- Speaker: 8Ω / 2W
- Power out: 12V/400mA
- Ethernet port: RJ45, 10/100Mbps adaptive
- 802.3af Power-over-Ethernet
- 12V DC connector (if not using PoE)
- Water-proof & Dust-proof: IP65
- Installation: Flush-mounted & Wall-mounted
- Flush-mounted DIM: 280x130x68mm
- Wall-mounted DIM: 280x130x38mm
- Working Humidity: 10~90%
- Working Temperature: -40°C ~ +55°C
- Storage Temperature: -40°C ~ +70°C