


NOR165

Soleniod Bolt


- Operating voltage 12Vdc
(24Vdc available to order)
- Die-Cast Metal
- Fail-Safe
- Adjustable Timer
- Monitored




Vertical




Horizontal



Attention



Maximum distance as 6mm.
It is unable to lock if the
spacing is exceeding 6mm.

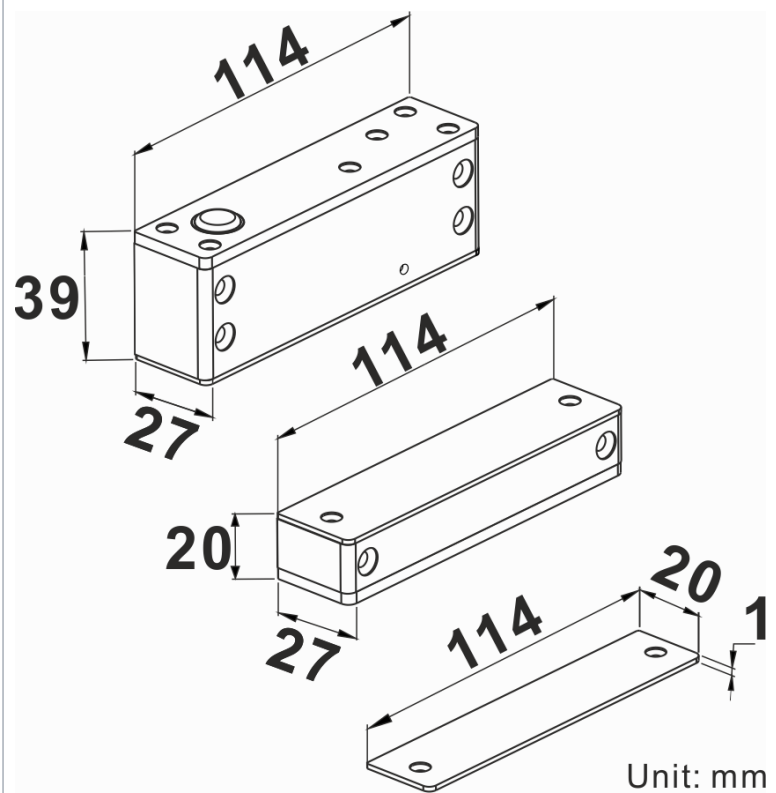

SPECIFICATION

- Voltage 12VDC.
- Current draw: 570mA at 12Vdc
- Monitoring: N/C Contact
- Adjustable Timer 0~3 seconds.
- Operational Door Gap 6mm Max
- Bolt : 14mm throw, 12.7mm Diameter