

DS-K5671-ZV Face Recognition Terminal



The face recognition terminal adopts deep learning algorithm, which helps to recognize the face faster and more accurate. It also supports multiple authentication modes: 1:N face match, etc. When installed on the turnstile, it can be applied in multiple scenarios, such as buildings, businesses, financial industries, and other important areas.

- Forced mask wearing alert: If the recognizing face does not wear a mask, the device will prompt a voice reminder. At the same time, the authentication or attendance will be failed
- Face mask wearing alert: If the recognizing face does not wear a mask, the device will prompt a voice reminder. At the same time, the authentication or attendance is valid
- Face recognition terminal for turnstile
- Built-in IO output or Wiegand output to communicate with the third-party turnstile
- 7 inch LCD Touch Screen, 2 M camera
- Max. 50,000 faces, and Max. 100,000 events
- Face recognition distance: 0.3 m to 3 m; Face recognition duration < 0.2 s/User; Accuracy rate ≥ 99%
- TCP/IP, Wi-Fi communication
- Remote live view via RTSP protocol
- IP65




▪ Specification

Display	
Dimensions	7-inch
Operation method	Capacitive touch screen
Video	
Pixel	2 MP
Lens	2
Network	
Communication protocol	TCP/IP; SIP; RTSP; HikCentral Pro OpenAPI; Hik-ProConnect OpenAPI
Wired network	10 M/100 M/1000 M self-adaptive
Wi-Fi	Support
Interface	
Network interface	1
Lock output	1
Door contact input	1
Capacity	
Face capacity	50,000
Event capacity	100,000
Authentication	
Face recognition duration	< 0.2 s per person
Face recognition accuracy rate	≥ 99%
Face recognition accuracy rate	0.3 to 3 m
Function	
Audio prompt	Support
Time synchronization	Support
General	
Power supply	12 VDC/ 2 A
Working temperature	-30 °C to 60 °C (-22 °F to 140 °F)
Working humidity	10 to 90% (No condensing)
Protective level	IP65
Language	English, Spanish (South America), Arabic, Thai, Indonesian, Russian, Vietnamese, Portuguese (Brazil)
Platform	Hik-ProConnect and HikCentral Professional

▪ Available Model

DS-K5671-ZV

▪ Dimension

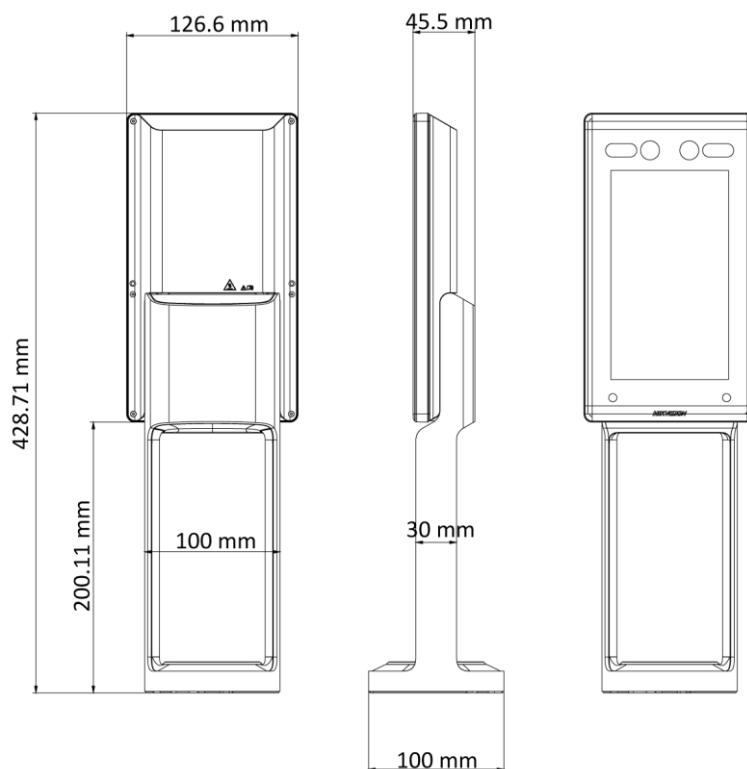

▪ Accessory

▪ Optional

DS-KAB5671-S Protective Shield	DS-K3B601 Pro Series Swing Barrier	DS-K3B801 Pro Series Swing Barrier	DS-K3B601A Pro Series Swing Barrier Plus
			
DS-KAB5671-S Protective Shield	DS-K3B801#CD	DS-K3B801A Pro Series Swing Barrier	
			

Distributed by



HIKVISION®

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
overseasbusiness@hikvision.com

Hikvision USA
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Australia
T +61-2-8599-4233
salesau@hikvision.com

Hikvision India
T +91-22-28469900
sales@pramahikvision.com

Hikvision Canada
T +1-866-200-6690
sales.canada@hikvision.com

Hikvision Thailand
T +662-275-9949
sales.thailand@hikvision.com

Hikvision Europe
T +31-23-5542770
sales.eu@hikvision.com

Hikvision Italy
T +39-0438-6902
info.it@hikvision.com

Hikvision Brazil
T +55 11 3318-0050
Latam.support@hikvision.com

Hikvision Turkey
T +90 (216)521 7070- 7074
sales.tr@hikvision.com

Hikvision Malaysia
T +601-7652-2413
sales.my@hikvision.com

Hikvision UK & Ireland
T +01628-902140
sales.uk@hikvision.com

Hikvision South Africa
Tel: +27 (10) 0351172
sale.africa@hikvision.com

Hikvision France
T +33(0)1-85-330-450
info.fr@hikvision.com

Hikvision Kazakhstan
T +7-727-9730667
nikia.panfilov@hikvision.ru

Hikvision Vietnam
T +84-974270888
sales.vt@hikvision.com

Hikvision UAE
T +971-4-4432090
salesme@hikvision.com

Hikvision Singapore
T +65-6684-4718
sg@hikvision.com

Hikvision Spain
T +34-91-737-16-55
info.es@hikvision.com

Hikvision Tashkent
T +99-87-1238-9438
uzb@hikvision.ru

Hikvision Hong Kong
T +852-2151-1761
info.hk@hikvision.com

Hikvision Russia
T +7-495-669-67-99
saleru@hikvision.com

Hikvision Korea
T +82-(0)31-731-8817
sales.korea@hikvision.com

Hikvision Poland
T +48-22-460-01-50
info.pl@hikvision.com

Hikvision Indonesia
T +62-21-2933759
Sales.Indonesia@hikvision.com

Hikvision Colombia
sales.colombia@hikvision.com