

EM02DS(B)

Single slim maglock, monitored with door status monitoring




Slim single lock-monitored magnetic lock. Compact design, making it ideal for most indoor applications where 275kg holding force is sufficient. Monitoring provides LED lock status indication and relay contacts for signalling. This model includes door status monitoring contacts to monitor the door position (open or closed).

Features

- MOV provides spike and surge protection
- Fail-safe operation (power to lock)
- Anti-residual magnetism protection
- Top-plate, armature-plate and fixings included
- Slim design
- Dual voltage 12Vdc or 24Vdc (selectable)
- Surface mount
- Silver anodised aluminium finish
- Lock monitoring
- Door status monitoring

Technical Information

- Holding force: up to 275kg (600lb)
- Current draw = 500mA @ 12Vdc / 250mA @ 24Vdc
- Voltage tolerance: +/- 15%
- Operating temp: -10°C to +55°C
- Humidity: 0-95% non-condensating
- Weight: 2kg approx.
- Red/Green LED indicator
- Relay: COM/NO/NC (1A@24Vdc)
- Reed switch door contact

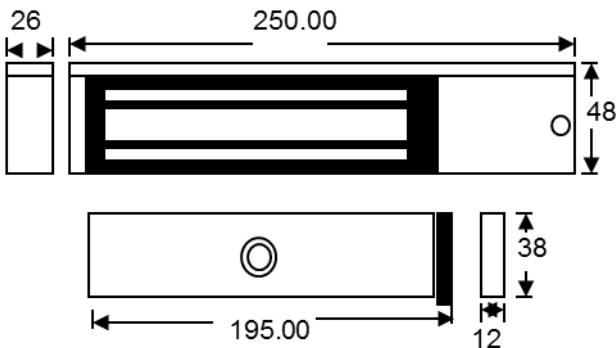

Related Products

EM05DS(B)



EM20DS(B)



EM300CL



EM300BZL

