


EM05DS(B)

Double slim maglock, monitored with door status monitoring

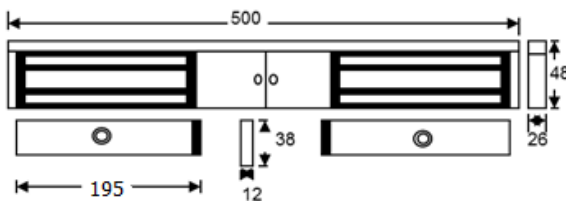

Slim monitored, double magnetic lock for double doors. Compact design making it ideal for most indoor applications where 275kg holding force is sufficient. Monitoring provides LED lock status indication and relay contacts for signalling. This model includes door status monitoring contacts to monitor each door position (open or closed).

Features

- MOV provides spike and surge protection
- Fail-safe operation (power to lock)
- Anti-residual magnetism protection
- Top-plate, armature-plate and fixings included
- Slim design
- Dual voltage 12Vdc or 24Vdc (selectable)
- Surface mount
- Silver anodized aluminium finish
- Lock monitoring
- Door status monitoring

Technical Information

- Holding force: up to 275kg (600lb) per side
- Current draw = 500mA @ 12Vdc / 250mA @ 24Vdc per side
- Voltage tolerance: +/- 15%
- Operating temp: -10°C to +55°C
- Humidity: 0-95% non-condensating
- Weight: 4kg approx.
- Red/green LED indicator (one per side)
- Relay : COM/NO/NC (1A@ 24Vdc) (one per side)
- Reed switch door contact (one per side)

Related Products

EM300ABP



EM300BZL



CP22



EM40DS

