



9502 EQ. 2pair Individual Foil Screened

Key Features


- High Frequency Low Loss
- Individually Foiled Screen
- LSF Sheath

Coaxial and Specialist Cable

Part No: See Below

General Description:

9502 Belden Equivalent cable consists of an 24AWG two pair with 7 strands of 0.25mm tinned copper wire. Sheathed overall in LSF and with a rated voltage of 300v.

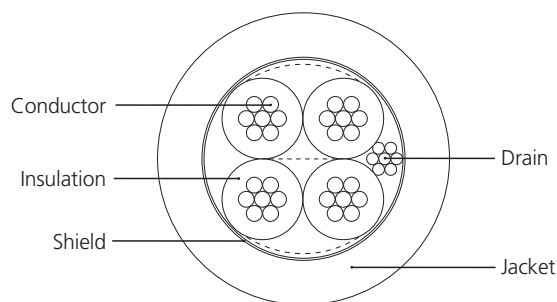

Relevant Test Standards:

UL1581

Part Numbers

TRI-002434	9502 Equivalent Two Pair Individual Foil Screened 22AWG LSF Grey – 100m
TRI-000138	9502 Equivalent Two Pair Individual Foil Screened 22AWG LSF Grey – Per Metre

Cable Construction:

Material Breakdown:

Conductor	Stranded Tinned Copper	
	Nom. O.D. (mm)	7*0.27 up +0.008 down -0.008
Insulation	FR-PVC	Diameter: 1.10 +0.13mm *2*2
Jacket	External O.D.	4.+60mm(+/-0.20mm)
	Surface	Clean / Smooth
	Outer Material	LSF (complies RoHS)
	Colour	Grey
Shield	AL-foil	Colour: Blue
Tubing Colours	White, Black - Red, Black	
Drain	Material:	Stranded Tinned Copper
	Nom O.D. (mm):	0.20*7 up/down (+0.008)

Electrical Characteristics:

Conductor Resistance	20°C, Conductor DC Resistance	< 9.41 Ω/100M
Insulation DC Resistance	20°C, Insulation DC Resistance	>200M Ω.M
Rated Voltage		300v
Rated Temperature (°C)		+80°C