
Essentials by vista


In Partnership with Securi-Flex®

8C-TY1-LSZH-B2-WHT

8 Core Type 1 Alarm White LSZH CPR:B2ca -s1b -a1 -d1 to BS4737-3.30:2015

Import / Export Commodity Code 8544492000 / 85444920

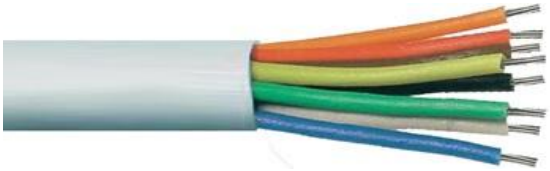



Cable Construction	7 Cores	1 Core
Conductor	Tinned Copper	Tinned Copper
Conductor Diameter (mm)	0.19 ±0.008 x 7	0.19 ±0.008 x 7
Stranded Diameter (mm)	0.22	0.22
Insulation	LSZH	LSZH
Insulation Thickness (mm)	0.21	0.30
Insulation Diameter (mm)	1.00 ±0.100	1.20 ±0.100
Insulation Colour(s)	Red,Black,Blue,Yellow,Green,White,Orange	Brown
Nylon Rip-Cord	Green 210D	
Jacket	LSZH	
Jacket Thickness (mm)	0.50	
Overall Diameter (mm)	5.40 ±0.100	
Jacket Colour	White RAL 9003	
Sheath Printing	(PO)(m)	
Reaction to Fire	B2ca -s1a -a1 -d1	
Electrical Characteristics		
Max Conductor DC resistance @ 20°C	100Ω/km	
Rated Temperature (°C)	-40°C to 70°C	
Rated Voltage (V)	30V	
Insulation Resistance @20°C	>200 MΩ/km	
Compliance and Standards	BS4737-3.30:2015,RoHS2 2011/65/EU	
Application	For the interconnection of intruder alarm installations.	