

## DS-3WF01C-2N Wireless Elevator Bridge



### Features and Functions


- High performance 802.11n 2x2 MIMO chip
- Four operating modes: Access Point, Client, Access Point (WDS), Client (WDS)
- Integrated XTrans technology, including TDMA, intelligent rate control, Auto ACK Time-out adjust
- TDMA solves the problems of hidden-node problem in the 802.11 network, thus having better long-distance and PTMP performance
- Point-to-point, point-to-multipoint connection
- Unique antenna, RF amplifier, and low noise receiver to ensure long-distance video transmission
- Web based working scenario selection makes the installation and setting much easier
- Multi-network interface design, more conducive to the expansion of a variety of applications
- Web-based configuration, easy to use
- High temperature and flame resistant housing ensure stable operation in harsh environments



## Specifications

Items		Specifications
Wireless	Standard	IEEE802.11 b/g/n(2T2R 300Mbps)
	Operation frequency	2412 to 2472 MHz(More Non-standard channels is availability,2312MHz to 2732MHz)
	Antenna	Internal, 6dBi, H: 65° V: 60°
	Max output power	27dBm
	Receive sensitivity	-72dBm@65Mbps, -97dBm@1Mbps
	Max transmission rate	11n: 300Mbps(HT40)/130Mbps(HT20) 11g: 54Mbps
Hardware	Power supply	48V/0.25A PoE or 12 VDC
	Interface	3×10/100M Base-TX (Cat. 5/5E, RJ-45) ports
	Operation temperature	-30°C to +65°C(-22°F to +149°F)
	Storage temperature	-40°C to +85°C(-40°F to +185°F)
	Operation humidity	5% to 95%RH non-condensing
	Dimensions	150×150×31.6 mm (5.9×5.9×1.24 inch)
Software	Application scenarios	Elevator Room/IP Camera
	Encryption	WPA-PSK/WPA2-PSK
	Network mode	Router/Bridge
	Security	IP/MAC filter, SSID hidden, Interface Isolation
	Network protocol	TCP/UDP/ARP/ICMP/DHCP/HTTP/NTP
	TDMA	Supported (Extend private communication protocol)
	Auto ACK timing adjust	Supported (It can automatically detect the distances of the devices, keep the performance always the best)
	Management and Logs	NTP, Syslog, Telnet, AC
	Web based configuration	Supported
	Firmware update	Support update firmware by Web page
	Bandwidth	20M/40MHz

## Physical Interfaces

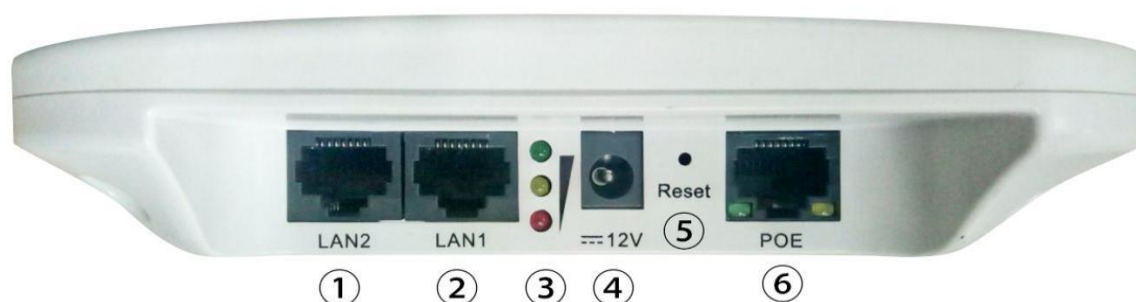

Index	Description	Index	Description
1	LAN1: Connect to camera, information distribution screen and other equipment	4	12 VDC power supply port
2	LAN2: Connect to camera, information distribution screen and other equipment	5	Reset Button: Restore default factory settings
3	Signal strength indicator	6	PoE: PoE port connection with PoE power supply

Distributed by



## Available Model

DS-3WF01C-2N

### Headquarters

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
overseasbusiness@hikvision.com

**Hikvision USA**  
T +1-909-895-0400  
sales.usa@hikvision.com

**Hikvision Italy**  
T +39-0438-6902  
info.it@hikvision.com

**Hikvision Singapore**  
T +65-6684-4718  
sg@hikvision.com

**Hikvision Europe**  
T +31-23-5542770  
saleseuro@hikvision.com

**Hikvision France**  
T +33(0)1-85-330-444  
info.fr@hikvision.com

**Hikvision Oceania**  
T +61-2-8599-4233  
salesau@hikvision.com

**Hikvision Middle East**  
T +971-4-8816086  
salesme@hikvision.com

**Hikvision Spain**  
T +34-91-737-16-55  
info.es@hikvision.com

**Hikvision Hong Kong**  
T +852-2151-1761

**Hikvision Russia**  
T +7-495-669-67-99  
saleru@hikvision.com

**Hikvision Poland**  
T +48-22-460-01-50  
poland@hikvision.com

**Hikvision Canada**  
T +1-909-895-0400  
sales.usa@hikvision.com

**Hikvision India**  
T +91-22-28469900  
sales@pramahikvision.com

**Hikvision UK**  
T +44-1628-9021-4  
support.uk@hikvision.com