

D.E.C.T 703


MULTI BUTTON



- Digital D.E.C.T wireless intercom system for flats, apartments or shared gate entrances.
- Up to 4 call buttons, each button calling a different handset.
- Working range of 100 metres through concrete (up to 500 metres open field).
- 1 handset per property or apartment.
- Simple setup and install.
- Keypad option for coded access.
- Built in voicemail feature for missed callers, user can listen to messages on handset.
- 2 year manufacturers warranty.

D.E.C.T 703

MULTI BUTTON

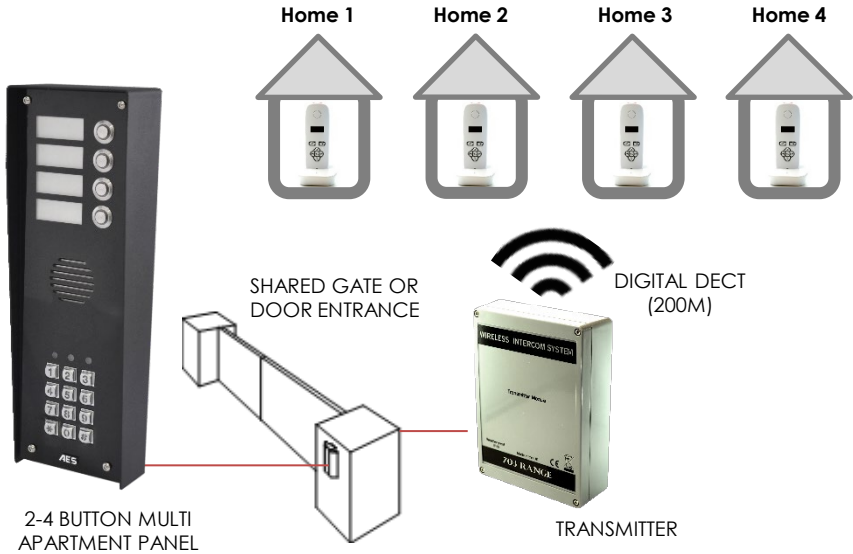

Technical Details

Power Supply	12-24v ac/dc (24v dc adaptor included).	Cable Between Speech Unit & Transmitter	4 metre screened CAT5 included.
Current Draw	50mA standby, 1 amp peak.	Max Cable Length	8 metres max.
Relay Outputs	2	Cable Cores	2 x SPK, 2 x MIC, 2 x button, 2 x relay, 2 x power.
Relay Time	Adjustable, 1,3,5,9 secs.	Speech Unit IP Rating	IP55.
Relay Load	Max 2 amps, 24v ac.	Transmitter IP Rating	IP65.
Technology Type	Digital DECT.	Manufacturer Warranty	2 years* (RTB).
Handsets per System	4	Keypad Programming	On the keypad.
Range	Practical working range of 100 metres. 500 metres open field conditions.	Keypad Codes	1200 codes total.

This is a total count of memory locations across 3 separate relays *

— **703-IMPK2**



4 button kit with 3 handsets (1 button spare), hooded panel with keypad. With prox reader.

— **703-HF-IMPK2**



4 button kit (1 button spare) with 3 wall mount monitors, hooded panel with keypad. With prox reader.

— **703-IMPK3**



4 button kit with 3 handsets (1 button spare), hooded panel with keypad. With prox reader.

— **703-HF-IMPK3**



4 button kit (1 button spare) with 3 wall mount monitors, hooded panel with keypad. With prox reader.

— **703-IMPK4**




4 button kit with 4 handsets, hooded panel with keypad. With prox reader.

— **703-IMPK4**




4 button kit with 4 wall mount monitors, hooded panel with keypad. With prox reader.

703-EH

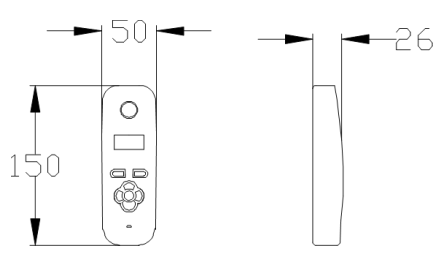

Additional handsets (up to total of 4 max per intercom, can be a mix and match of both styles.)


703-HF

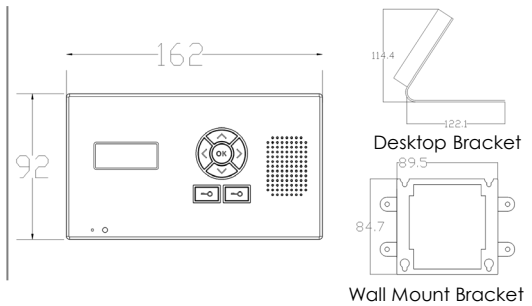


Additional handsets (up to total of 4 max per intercom, can be a mix and match of both styles.)

703 Call Panel (Keypad) and Transmitter Dimensions

-703 panel

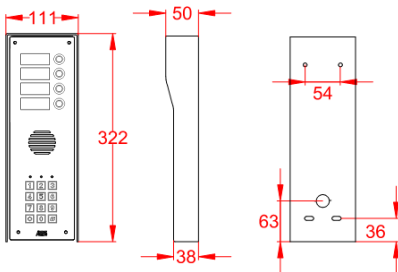


-703 prox call panel

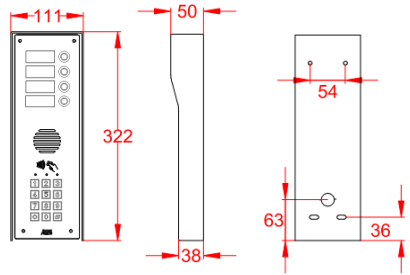

D.E.C.T 703


MULTI BUTTON WITH PROX

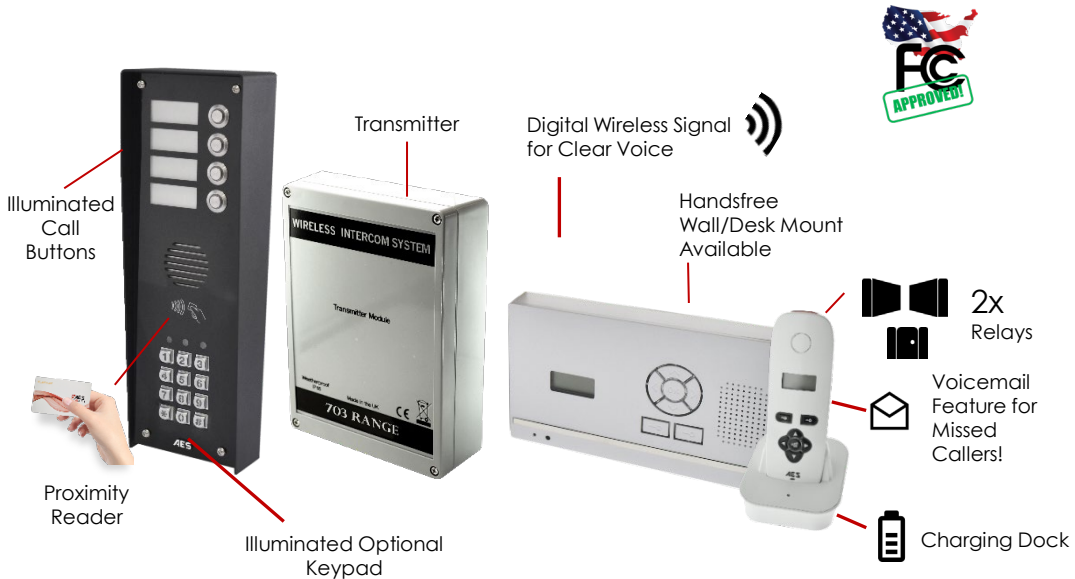

- Digital D.E.C.T wireless intercom system for flats, apartments or shared gate entrances.
- Up to 4 call buttons, each button calling a different handset.
- Working range of 100 metres through concrete (up to 500 metres open field).
- 1 handset per property or apartment.
- Simple setup and install.
- Keypad option for coded access.
- Built in voicemail feature for missed callers, user can listen to messages on handset.
- Built in proximity reader.
- 2 year manufacturers warranty.

D.E.C.T 703

MULTI BUTTON WITH PROX

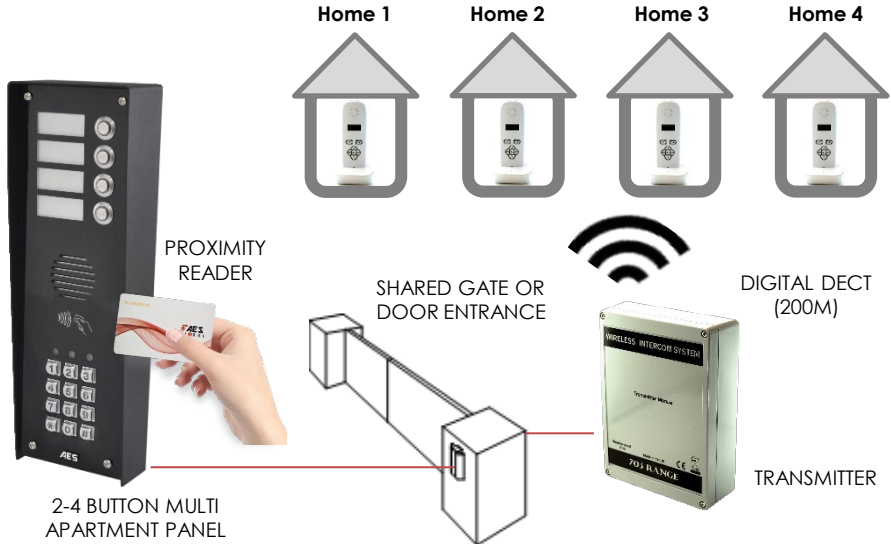

Technical Details			
Power Supply	24v ac/dc (24v dc adaptor included).	Max Cable Length	8 metres max.
Current Draw	50mA standby, 1 amp peak.	Cable Cores	2 x SPK, 2 x MIC, 2 x button, 2 x relay, 2 x power.
Relay Outputs	2	Speech Unit IP Rating	IP55.
Relay Time	Adjustable, 1,3,5,9 secs.	Transmitter IP Rating	IP65.
Relay Load	Max 2 amps, 24v ac.	Manufacturer Warranty	2 years* (RTB).
Technology Type	Digital DECT.	Keypad Programming	On the keypad.
Handsets per System	4	Keypad Codes	1200* codes total.
Range	Practical working range of 100 metres. 500 metres open field conditions.	Tag/Card Type	125kHz fixed digit code card, passive type.
Cable Between Speech Unit & Transmitter	4 metre screened CAT5 included.	Tag/Card Quantity	1200*

This is a total count of memory locations across 3 separate relays *

DECT 703 PROX MULTI BUTTON

— 703-PX-IMPK2



4 button kit with 3 handsets (1 button spare), hooded panel with keypad. With prox reader.

— 703-PX-HF-IMPK2



4 button kit (1 button spare) with 3 wall mount monitors, hooded panel with keypad. With prox reader.

— 703-PX-IMPK3



4 button kit with 3 handsets (1 button spare), hooded panel with keypad. With prox reader.

— 703-PX-HF-IMPK3



4 button kit (1 button spare) with 3 wall mount monitors, hooded panel with keypad. With prox reader.

— 703-PX-IMPK4



4 button kit with 4 handsets, hooded panel with keypad. With prox reader.

— 703-PX-HF-IMPK4



4 button kit with 4 wall mount monitors, hooded panel with keypad. With prox reader.