

Sonos Sounder (DC)

A general purpose electronic sounder for fire, security and industrial applications; the Sonos Sounder is certified to EN54.

With the TimeSaver base, connections are made to the base during the initial wiring phase which results in faster and more reliable installation. The sounder head 'twists and clicks' into the base on commissioning, avoiding the wiring and connection problems associated with traditional sounders.

With a choice of 32 tones including all the major international standards, the Sonos Sounder has universal acceptance.

Deep base units have weatherproof protection to IP65 and can be used in all locations both indoors and outdoors.


Sonos Sounder units are available in either red or white and with a choice of deep or shallow TimeSaver base.

Features

- Wide voltage range
- Simple 'First Fix' installation
- 32 tones
- Tone and volume can be preset or adjusted off-base
- Weatherproof to IP65 (deep base units)
- Synchronised alarm tones
- Volume control - 20dB



Applications - Fire; security; industrial alarm

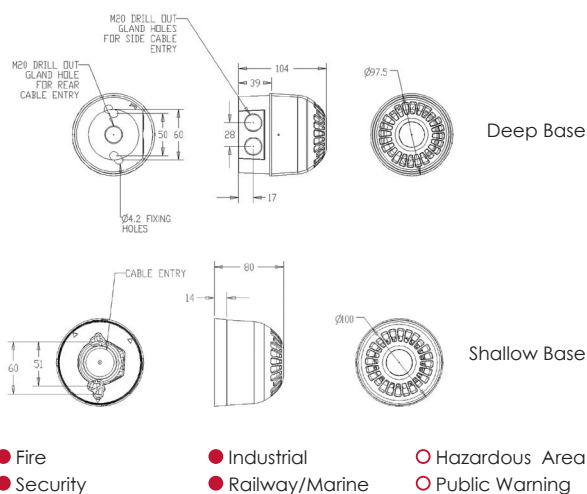

Specifications

| Combined Part No. | Base Part No. | Head Part No. | Colours | Audibility at 1m | Tones | Voltage * | Current (tone dependent) |
|-------------------|-----------------------|---------------|---------|------------------|-------|-----------|--------------------------|
| PSS-0003 | PSO-0001 shallow base | PSS-0084 | Red | Up to 106dB (A) | 32 | 9-60V DC | 4-41mA |
| PSS-0039 | PSO-0006 shallow base | PSS-0089 | White | Up to 106dB (A) | 32 | 9-60V DC | 4-41mA |
| PSS-0020 | PSO-0003 deep base | PSS-0084 | Red | Up to 106dB (A) | 32 | 9-60V DC | 4-41mA |
| PSS-0050 | PSO-0007 deep base | PSS-0089 | White | Up to 106dB (A) | 32 | 9-60V DC | 4-41mA |

*EN54 compliant at 17-60V

IP Rating: IP65 (deep base) IP21 (shallow base) **Rating:** Continuous **Frequency:** 400-2850Hz **Operating Temp:** -25°C to +70°C

Construction: Flame Retardant Polycarbonate **Cable Entries:** Deep Base: 2 x 20mm cable glands

Weight: 0.22kg (shallow base) 0.25kg (deep base) **Compliance:** EN54 3 Type A (shallow base) EN54 3 Type B (deep base)